


- SMD TYPE. Reflow Soldering is available.
- Life 2000 hours at 85°C
- Available For High Density Mounting

Characteristics

Voltage Range	4 to 450 VDC												
Capacitance Range	0.1 to 6800uF												
Temperature Range	-40 to +85°C												
Capacitance Tolerance	+20% -20% (at 20°C, 120Hz)												
Leakage Current	SIZE A~F: I≤0.01CV or 3uA, whichever is greater 2 minutes after Rated Voltage applied SIZE G~I(6.3V~100V): I≤0.03CV whichever is greater 1 minutes after Rated Voltage applied SIZE G~I (160V~450V): I≤0.04CV +100Ua whichever is greater 1 minutes after Rated Voltage applied												
Dissipation Factor (tan δ)Max (at 20°C, 120Hz)	Voltage (V)	4	6.3	10	16	25	35	50	63	100	160~250	400~450	
	SIZE A~C	0.4	0.26	0.22	0.18	0.16	0.13	0.12	-	-	-	-	
	SIZE D~F	-	0.35	0.26	0.20	0.16	0.14	0.12	0.12	0.10	-	-	
	SIZE G~I	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.1	0.20	0.25	
Stability at Low Temperature (at 120Hz)	Voltage (V)	4	6.3	10	16	25	35	50	63	100	160~250	400~450	
	Z -25°C	SIZE A~F	7	4	3	3	2	2	2	2	3	-	-
	/Z +20°C	SIZE G~I			5	4	2	3	2	2	2	3	6
	Z -40°C	SIZE A~F	17	17	10	4	3	2	2	3	4		
/Z 20°C	SIZE G~I			12	10	5	4	3	3	3	6	10	
Load Life	After the rated voltage has been applied for 2000 hours at 85°C		Capacitance change					Within ±25% of initial value					
			D.F. tanδ					200% or less of initial specified value					
			Leakage current					Less than Initial specified value					
Shelf Life	After storage for 1000 hours at 85°C, with no voltage applied and being stabilized at +20°C, Capacitor shall meet the limit specified in load life.												

Diagram of dimensions

SIZE	Dφ	L	A	C	B	W	P
A	4	5.5	4.3	4.3	5.1	0.5~0.8	1.0
B	5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
C	6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.0
C8	6.3	7.7	6.6	6.6	7.2	0.5~0.8	2.0
D	8	6.5	8.3	8.3	9.0	0.5~0.8	2.2
E	8	10.5	8.3	8.3	9.0	0.8~1.1	3.1
F	10	10.5	10.3	10.3	11.0	0.8~1.1	4.5
G	12.5	13.5	12.8	12.8	14.4	1.1~1.4	4.6
H	12.5	16.0	12.8	12.8	14.4	1.1~1.4	4.6
I	16	16.5	16.3	16.3	17.6	1.8~12.2	6.0

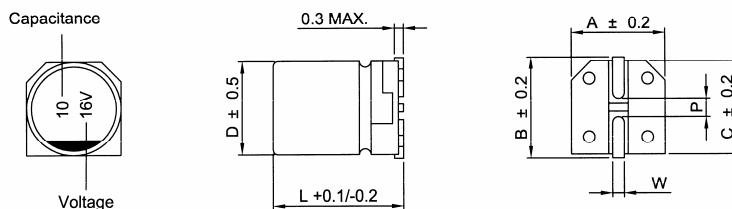

Case size & Maximum Ripple Current

mA rms 85°C 120Hz

Cap. uF	4		6.3		10		16		25		35		50	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1													A	1.0
0.22													A	2.0
0.33													A	2.8
0.47													A	4.0
1													A	8.4
2.2													A	13
3.3													A	17
4.7									A	16	A	18	A	20
10					A	20	A	23	A	27	A, B	22/29	B, C	30/33
22			A	28	A	33	A, B	30/39	B, C	38/58	B, C	39/60	C, D	45/80
33	A	28	A	37	A	41	B	44	B, C	46/65	C	58	E	110
47	A	33	A, B	40/46	B	47	B, C	52/58	C	60	C, D	70/155	C8, D	105/140
100	B	56	B, C	47/71	B, C	54/76	C	86	D	160	C8, D	132/175	E, F	181/195
220	C	96	C, D	143/160	C8, D	173/250	C8, D	162/280	E	250	E, F	246/265	F	320
330	C8, D	145/152	C8, D	188/190	E	330	E	330	E, F	305	F	360	G	600
470	C8, D	200/220	E	265	E	290	E, F	275/330	F	375	G	600	I	740
1000	E	344	E, F	372/400	F	415	G	820	G	820	I	1100		
2200			G	890	H	960	I	1500	I	1450				
3300			H	1000	I	1300	I	1500						
4700			I	1400	I	1300								
6800			I	1700										

Cap. uF	63		100		160		200		250		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple			Size	Ripple	Size	Ripple	Size	Ripple
0.1	A	1.3												
0.22	A	3												
0.33	A	4												
0.47	A	5												
1	A	8												
2.2	A	12												
3.3	B	17												
4.7	B	20									G	120	G	120
10	C	32	E	90					G	150	G	120	H	130
22	C8	60	E	90			G	240	G	150	I	140	I	140
33	C8	60	F	120	G	240	H	310	H	240	I	140		
47	E	130	F	120	H	370	I	340	I	340				
68	F	170	G	380	I	500	I	340						
100	G	380	G	380										
220	G	580	I	500										
330	H	720												
470	I	950												