



221 Series

The Way to Connect!

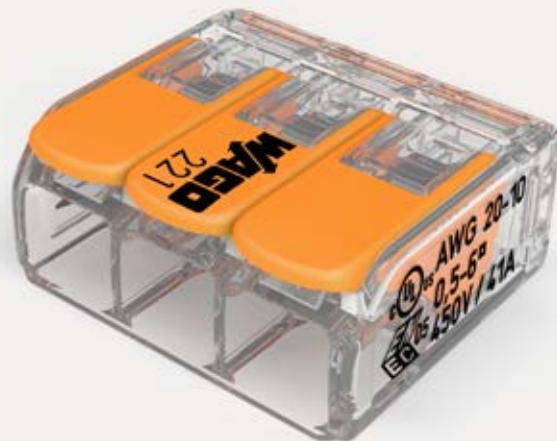

WAGO 221

COMPACT Lever Connectors for All Conductor Types




221-413,
4 mm² version

221-613,
6 mm² version

- Continuous service temperature: max. 105°C
- Ambient temperature: max. 85°C (T85)



Carrier			
	Description	Item No.	Pack. Unit
	Strain relief plate; for 221-500 Mounting Carrier	222-505	10
	Mounting carrier; for 2-, 3- and 5-con connectors; 4 mm ² version	221-500	10
	Angled DIN-rail adapter; for horizontal mounting of 221-500 carrier on DIN-35 rail	222-510	10
NEW	Mounting carrier; for 2-, 3- and 5-con connectors; 6 mm ² version	221-510	10



Two test slots



Industry's widest range of conductor sizes

- Combine any type and size of conductors



Transparent housing

- Clearly identify if the conductor has been stripped and inserted properly

4 mm ² version		
0.14 ... 4 mm ²		450 V / 4 kV / 2
0.2 ... 4 mm ²		32 A

	Description	Item No.	Pack. Unit
	2-conductor connectors	221-412	100
	3-conductor connectors	221-413	50
	5-conductor connectors	221-415	25

6 mm ² version		
0.5 ... 6 mm ²		450 V / 4 kV / 2
		41 A

	Description	Item No.	Pack. Unit
	2-conductor connectors	221-612	50
	3-conductor connectors	221-613	30
	5-conductor connectors	221-615	15

Carrier for 4mm ² version			
	Description	Item No.	Pack. Unit

	Mounting carrier; for 2-con connectors; for screw mounting	221-502	10
	Mounting carrier; for 3-con connectors; for screw mounting	221-503	10
	Mounting carrier; for 5-con connectors; for screw mounting	221-505	10

Now available from your electrical wholesalers

ukmarketing@wago.com – www.wago.com/221