





HPE-352T

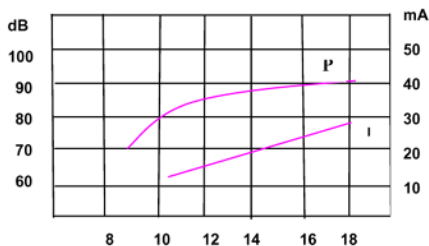

Model Number	HPE-352T1	HPE-352T2	HPE-352T3	HPE-352T4	HPE-352T5
Rated Voltage(VDC)	12	12	12	12	12
Operating Voltage(VDC)	6-28	6-28	6-28	6-28	6-28
Max Rated Current (mA)	20	20	20	20	20
Mini Sound Output at60cm(dB)	80	80	80	80	80
Resonant Frequency(Hz)	2900±500	2900±500	2900±500	2900±500	2900±500
Operating Temperature(°C)	-20~+70	-20~+70	-20~+70	-20~+70	-20~+70
Storage Temperature(°C)	-30~+80	-30~+80	-30~+80	-30~+80	-30~+80
Tone	Continuous	Fast Pulse	Slow Pulse	Continuous Fast Pulse	Fast Pulse Slow Pulse
Material	ABS				

Dimension

HPE-352T1 HPE-352T2 HPE-352T3
 HPE-352T4 HPE-352T5



Tolerance: ±0.5 Unit:mm