
SPECIFICATION SHEET


ELECTRICAL SPECIFICATIONS: (STANDARD TEST CONDITION)

| Туре | Unit EPI-15A4005P | |
|-----------------------------|-------------------|----------------|
| Rated voltage | VDC | 5 |
| Operating Voltage | VDC | 1-12 |
| *Rated Current(MAX) | mA | 15 |
| * Min Sound Output at 10 cm | dB | 83 |
| *Resonant Frequency | Hz | 4000 ± 500 |
| Tone Nature | | single |
| Lead Pin Material | | Red Copper |
| Operating Temperature | ° C | -30 - +70 |
| Storage Temperature | ° C | -40 - +85 |
| Weight | g | 2. 5 |

*Value Applying at Rated Voltage. (VDC)

DIMENSIONS UNIT:mm Tolerance: ± 0.5 mm

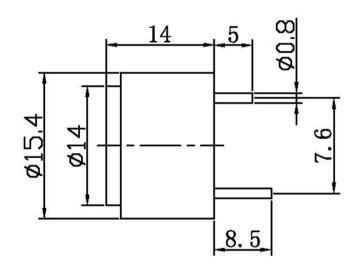



Housing material:NORYL wave solder allowed and wash not allowed

| 1 | | | | | | | EPI-15A4005P | |
|-------------|----------|------------|--|--|---|---------------|--------------|--|
| NAME DATE | | | | | 1 | EI I 15A40051 | Page 1/1 | |
| Drawing by | James Li | 08. 11. 20 | | | | | | |
| Checked by | Laur Wu | 08. 11. 20 | | | | | 1 | |
| Approved by | Li tao | 08. 11. 20 | | | | | | |