

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D


D

E

E




F

F



# SPECIFICATION

- 1. Rated Voltage ..... 5 VDC
- 2. Operating Voltage ..... 4~7 VDC
- 3. Max. Rated Current ..... 30mA/5VDC
- 4. Min. Sound Pressure Level ..... 85dB/10cm
- 5. Resonant Frequency ..... 2300±300Hz
- 6. Response Time .....
- 6. Case Material ..... NORYL
- 7. Operating Temperature ..... -20~+70°C
- 8. Store Temperature ..... -30~+80°C
- 9. Weight ..... 2g

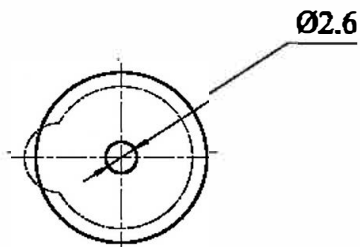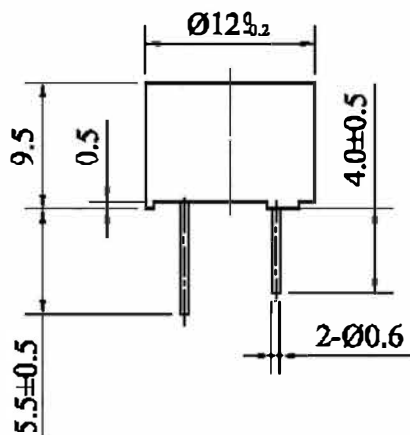

- \* Wave solderable and washable
- \* RoHS Compliant

Customer: JPR ELECTRONICS  
Customer's code: 400-805

1

2

3

4

5

6

7

8