


**SAFETY ISOLATING TRANSFORMER**

POWER : 1VA  
 INPUT VOLTAGE : 230V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x9V

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER  
 IPOO  
 UL94V0  
 OPERATING TEMPERATURE : -25°C to 70°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 INHERENT PROTECTION

- STANDARDS :
- UL506 (File E111078)
  - CSA 22-2 (File E111078)
  - UL1585 (File E240724)
  - VDE (File Ref:1398300)
  - EN60950 (File Ref:1398300)
  - EN61558-1 (File Ref:1398300)
  - EN61558-2-6 (File Ref:1398300)
  - CE

<b>44056</b> 230V 50/60Hz (1-5) 9V 0.5VA (6-7) 9V 0.5VA (9-10) ① ta 70/B ⑤	<b>myrra</b> CE Class II not wet Class III wet EN 60950 www.myrra.com	N°31
--	--	------

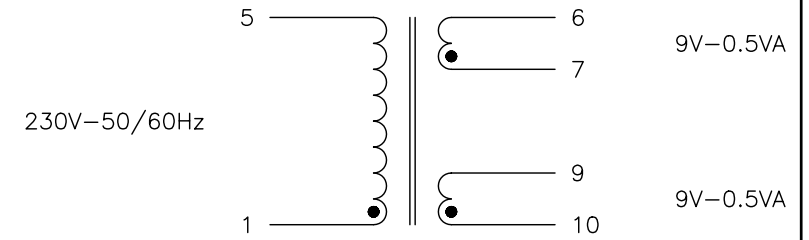

<b>Finition:</b>		<b>Tolérance générale:</b>	
<b>Finition:</b>		<b>General tolerance:</b>	
<b>Ech:</b> 1:1	<b>Matière:</b>		
	<b>Material:</b>		
<b>Dessiné par:</b> ROUSSEL.Ch	<b>Date:</b> 17/05/2004	<b>Visa:</b>	J.P.M.

D					
C					
B					
A					
<b>Rev</b>	<b>Date</b>	<b>Modification</b>	<b>Dessiné</b>	<b>Visa</b>	

**DATA SHEET 44056**  
**EI 30x10.5**

	22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGIEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00	<b>DS44056</b>
--	--	----------------