

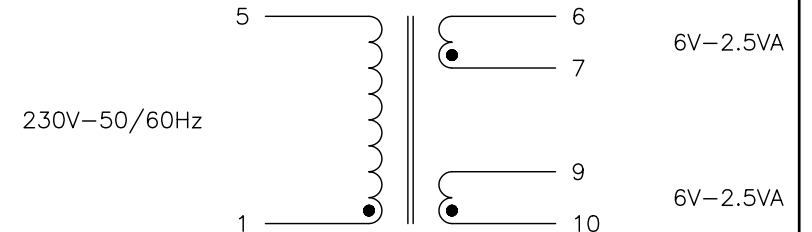



SAFETY ISOLATING TRANSFORMER

POWER : 5VA  
 INPUT VOLTAGE : 230V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x6V

NON SHORT CIRCUIT PROOF TRANSFORMER  
 IP00  
 UL94V0  
 OPERATING TEMPERATURE : -25°C to 50°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : 400mA FUSE ON EACH SECONDARY

STANDARDS :  
 UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 VDE (File Ref:1398300)  
 EN60950 (File Ref:1398300)  
 EN61558-1 (File Ref:1398300)  
 EN61558-2-6 (File Ref:1398300)  
 CE



Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par: ROUSSEL.Ch	Date: 27/09/2005	Visa:	J.P.M.

Rev	Date	Modification	Dessiné	Visa

**DATA SHEET 44235**  
**EI 42x14.8**

22 Allée du Clos des Charmes  
 Z.A. Les Portes de la Forêt  
 77090 COLLEGIEN  
 Tel : 01-60-37-55-55  
 Fax : 01-60-17-12-00

**DS44235**