
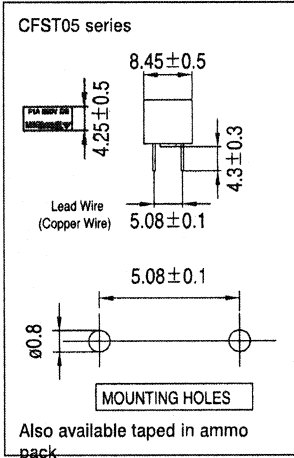


Radial Lead Fuses (Square)



Specification

Approvals: *Quick Blow* 50mA – 5A VDE
 50mA – 6.3A CSA
 50mA – 6.3A

Approvals: *Time Delay* 40mA – 4A VDE
 40mA – 6.3A CSA
 40mA – 6.3A

Electrical characteristics:

	1.5 In		2.1 In		2.75 In		4 In		10 In	
	min	max	min	max	min	max	min	max	min	max
<i>Quick Blow</i>										
50mA – 5A	60 min	30 mins	10mS	3 secs	3ms	300mS			20mS	
<i>Time Delay</i>										
40mA – 5A	60 min	2 mins	400mS	10 secs	150mS	3 secs	20mS	150mS		
6.3A	60 min	2 mins	400mS	10 secs	150mS	3 secs	15mS	150mS		

Interrupt ratings Greater of 35A or 10In @250VAC

Voltage Rating: 250V

Soldering conditions: Infrared reflow: 260°, 20 secs max
 Wave solder 260°, 10 secs max

Quick Blow			Code			Rating			I ² t		
CFST05F/50	50mA	0.000325	CFST05F/600	600mA	0.119000	CFST05T/40	40mA	0.016000	CFST05T/500	500mA	1.250000
CFST05F/63	63mA	0.001580	CFST05F/800	800mA	0.192000	CFST05T/50	50mA	0.020000	CFST05T/630	630mA	2.302000
CFST05F/80	80mA	0.003200	CFST05F/1A	1A	0.300000	CFST05T/63	63mA	0.027700	CFST05T/800	800mA	3.136000
CFST05F/100	100mA	0.005000	CFST05F/1.25A	1.25A	0.468700	CFST05T/80	80mA	0.019200	CFST05T/1A	1A	6.500000
CFST05F/125	125mA	0.006250	CFST05F/1.6A	1.6A	0.896000	CFST05T/100	100mA	0.030000	CFST05T/1.25A	1.25A	12.500000
CFST05F/160	160mA	0.007680	CFST05F/2A	2A	1.200000	CFST05T/125	125mA	0.109000	CFST05T/1.6A	1.6A	18.944000
CFST05F/200	200mA	0.024000	CFST05F/2.5A	2.5A	2.500000	CFST05T/160	160mA	0.133100	CFST05T/2A	2A	32.000000
CFST05F/250	250mA	0.043750	CFST05F/3.15A	3.15A	3.969000	CFST05T/200	200mA	0.200000	CFST05T/2.5A	2.5A	37.500000
CFST05F/315	315mA	0.059530	CFST05F/4A	4A	7.200000	CFST05T/250	250mA	0.375000	CFST05T/3.15A	3.15A	84.341000
CFST05F/400	400mA	0.080000	CFST05F/5A	5A	15.000000	CFST05T/315	315mA	0.545700	CFST05T/4A	4A	144.000000
CFST05F/500	500mA	0.083000	CFST05F/6.3A	6.3A	47.628000	CFST05T/400	400mA	1.040000	CFST05T/5A	5A	162.500000
									CFST05T/6.3A	6.3A	277.830000