


Rated Current (A)	Body Color	Rated Voltage	Voltage Drop
1	Black	32V	250mV
2	Gray		225mV
3	Violet		200mV
4	Pink		
5	Tan		175mV
7.5	Brown		150mV
10	Red		140mV
15	Light Blue		125mV
20	Yellow		
25	Natural (White)		120mV
30	Green		
35	Purple		
40	Orange		

According to ISO 8820 Standard Specifications
Electrical Characteristics

% of Rated Current	Operating Time
110%	> 100 h
135%	0.75 ~1800 s
200%	0.15~5 s
350%	0.04~0.5 s
600%	0.02~0.2 s

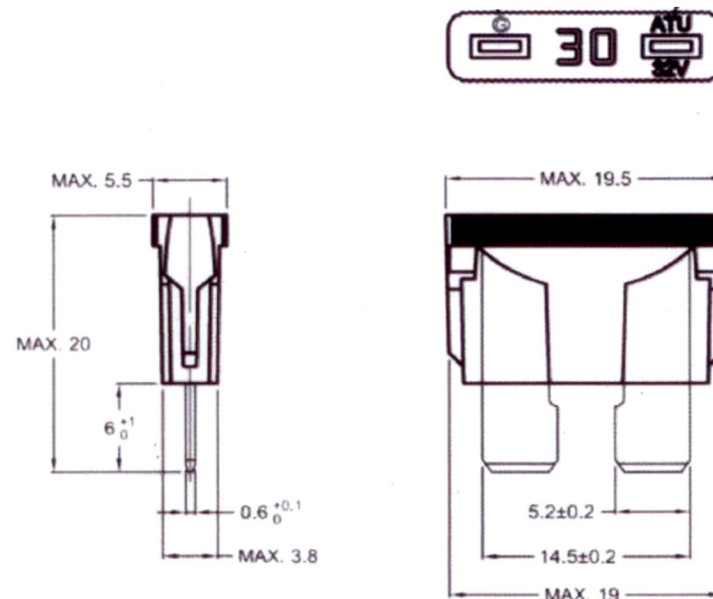

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2' XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	TITLE Blade-Type Fuse
		DRAWN BY JANE	
APPROVED BY 鄭文和	PART NO. ATU Series		
P/N	DATE 2009.06.29	DRAWING NO. BA04050800	
REV B	SCALE		