


| Part ref. | Rated Functioning Temp (°C) | Fusing-off Temp (°C) |         | Holding Temp (°C) | Maximum Temp Limit (°C) | Rated Current (A) | Rated Voltage (V) |
|-----------|-----------------------------|----------------------|---------|-------------------|-------------------------|-------------------|-------------------|
|           |                             | IEC                  | Corp    |                   |                         |                   |                   |
| A0-3A-F   | 84°C                        | 84 +0/-10            | 82 ± 2  | 65                | 203                     | 3                 | 250               |
| A1-3A-F   | 102°C                       | 102 +0/-10           | 98 ± 2  | 80                | 203                     | 3                 | 250               |
| A2-3A-F   | 115°C                       | 115 +0/-10           | 112 ± 3 | 99                | 203                     | 3                 | 250               |
| A3-3A-F   | 125°C                       | 125 +0/-10           | 120 ± 3 | 105               | 203                     | 3                 | 250               |
| A4-3A-F   | 130°C                       | 130 +0/-10           | 126 ± 3 | 107               | 203                     | 3                 | 250               |
| A5-3A-F   | 135°C                       | 135 +0/-10           | 131 ± 3 | 115               | 203                     | 3                 | 250               |
| A7-3A-F   | 138°C                       | 138 +0/-10           | 135 ± 2 | 118               | 203                     | 3                 | 250               |
| A12-3A-F  | 145°C                       | 145 +0/-10           | 140 ± 2 | 126               | 203                     | 3                 | 250               |
| A8-3A-F   | 150°C                       | 150 +0/-10           | 145 ± 3 | 128               | 203                     | 3                 | 250               |
| A16-3A-F  | 160°C                       | 160 +0/-10           | 155 ± 2 | 140               | 203                     | 3                 | 250               |

| Approvals |          |         |         |     |         |
|-----------|----------|---------|---------|-----|---------|
| Part ref. | UL / CUL | VDE     | CCC     | PSE | KTL     |
| A0-3A-F   | ✓        | ✓       | Pending | ✓   | ✓       |
| A1-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A2-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A3-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A4-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A5-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A7-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A12-3A-F  | ✓        | ✓       | ✓       | ✓   | ✓       |
| A8-3A-F   | ✓        | ✓       | ✓       | ✓   | ✓       |
| A16-3A-F  | ✓        | Pending | ✓       | ✓   | Pending |

## Product range - Ax-3A-F

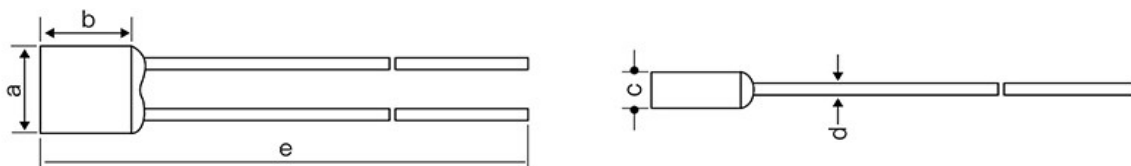

| Part ref. | a         | b         | c         | d           | e      |
|-----------|-----------|-----------|-----------|-------------|--------|
| Ax-3A-F   | 6.2 ± 0.5 | 6.3 ± 0.5 | 2.5 ± 0.3 | ∅0.6 ± 0.05 | 70 ± 3 |



**JPR Electronics Ltd**  
Unit 4, Circle Business  
Centre.  
Blackburn Road,  
Dunstable.  
Bedfordshire. LU5 5DD  
England.  
e: sales@jprelec.co.uk  
t: +44(0)1582 47 00 00