

# Terminals

## Fork Terminals

**• Materials:**

Conductor: Copper  
 Insulation: Vinyl  
 Plating: Tin

**• Operating Temperature:**

-10°C to +75°C.


**• Features:**

Max. voltage rating: 600V.  
 Flared barrel for easy wire insertion.  
 Low insertion force and easy crimping whilst ensuring secure termination.



**Material**

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

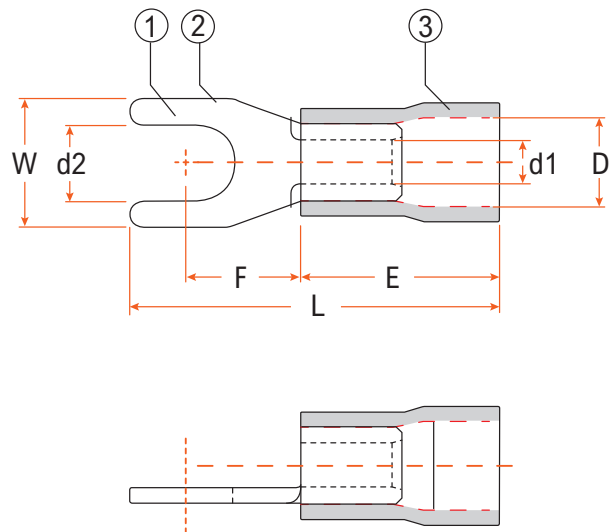

**Max. current rating**

Red	19A
Blue	27A
Yellow	48A

See product technical table on next page

# Terminals

## Fork Terminals

Item No.	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)						
			D	d1	d2	W	L	E	F
RF32	Red	0.5-1.5	4.3	1.7	3.3	5.7	21.0	10.0	6.5
RF37	Red	0.5-1.5	4.3	1.7	3.8	5.7	21.0	10.0	6.5
RF43	Red	0.5-1.5	4.3	1.7	4.4	6.4	21.0	10.0	6.5
RF53	Red	0.5-1.5	4.3	1.7	5.4	8.1	21.0	10.0	6.5
RF64	Red	1.5-2.5	4.3	1.7	6.6	9.5	21.0	10.0	6.5
BF32	Blue	1.5-2.5	4.8	2.3	3.3	5.7	21.0	10.0	6.5
BF37	Blue	1.5-2.5	4.8	2.3	3.8	5.7	21.0	10.0	6.5
BF43	Blue	1.5-2.5	4.8	2.3	4.4	6.4	21.0	10.0	6.5
BF53	Blue	1.5-2.5	4.8	2.3	5.4	8.1	21.0	10.0	6.5
BF64	Blue	1.5-2.5	4.8	2.3	6.6	9.3	21.0	10.0	6.5
YF37	Yellow	4.0-6.0	6.7	3.4	3.8	8.3	25.5	13.0	7.0
YF43	Yellow	4.0-6.0	6.7	3.4	4.4	8.3	25.5	13.0	7.0
YF53	Yellow	4.0-6.0	6.7	3.4	5.4	9.0	25.5	13.0	7.0
YF64	Yellow	4.0-6.0	6.7	3.4	6.6	9.0	25.5	13.0	7.0
YF84	Yellow	4.0-6.0	6.7	3.4	8.5	14.0	30.5	13.0	11.5