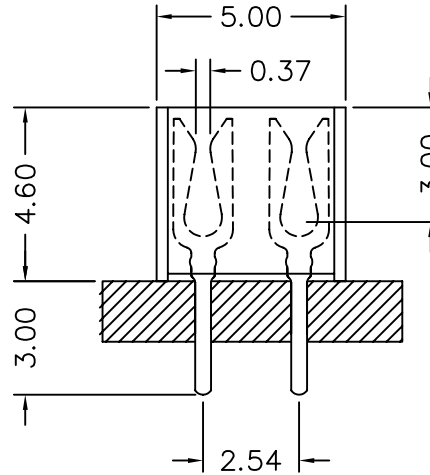


Recommended P.C.B Layout



Specifications



Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon-6T

640-7 2- xx G B 02  
 1 2 3 4 5 6

- 1. 5: Normal Parts
- 7: Green Product
- 9: Green Product High Temp
- 2. 1: Single row
- 2: Dual rows
- 3. No. of contacts per row
- 4. G: Gold flash
- T: Tin plated
- 5. B: Black Insulator
- 6. Pinrex internal code.

			<b>TOLERANCE</b> .0 = ±.38 .00 = ±.25 .000 = ±.XXX .0000 = ±. ANG. = ±3°		 UNITS : mm		OLD PART NO.		TITLE FEMALE HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS BASE 4.60		 頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.	
			SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. <b>A</b>	APP'D	NEW PART NO. 640-72-xxGB02	DRAW NO. 640-72-xxGB02			
A	RELEASE	2006/05/12										
REV.	DESCRIPTION	DATE										