


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3007-8365)	TINA	08-262	10-08'2008

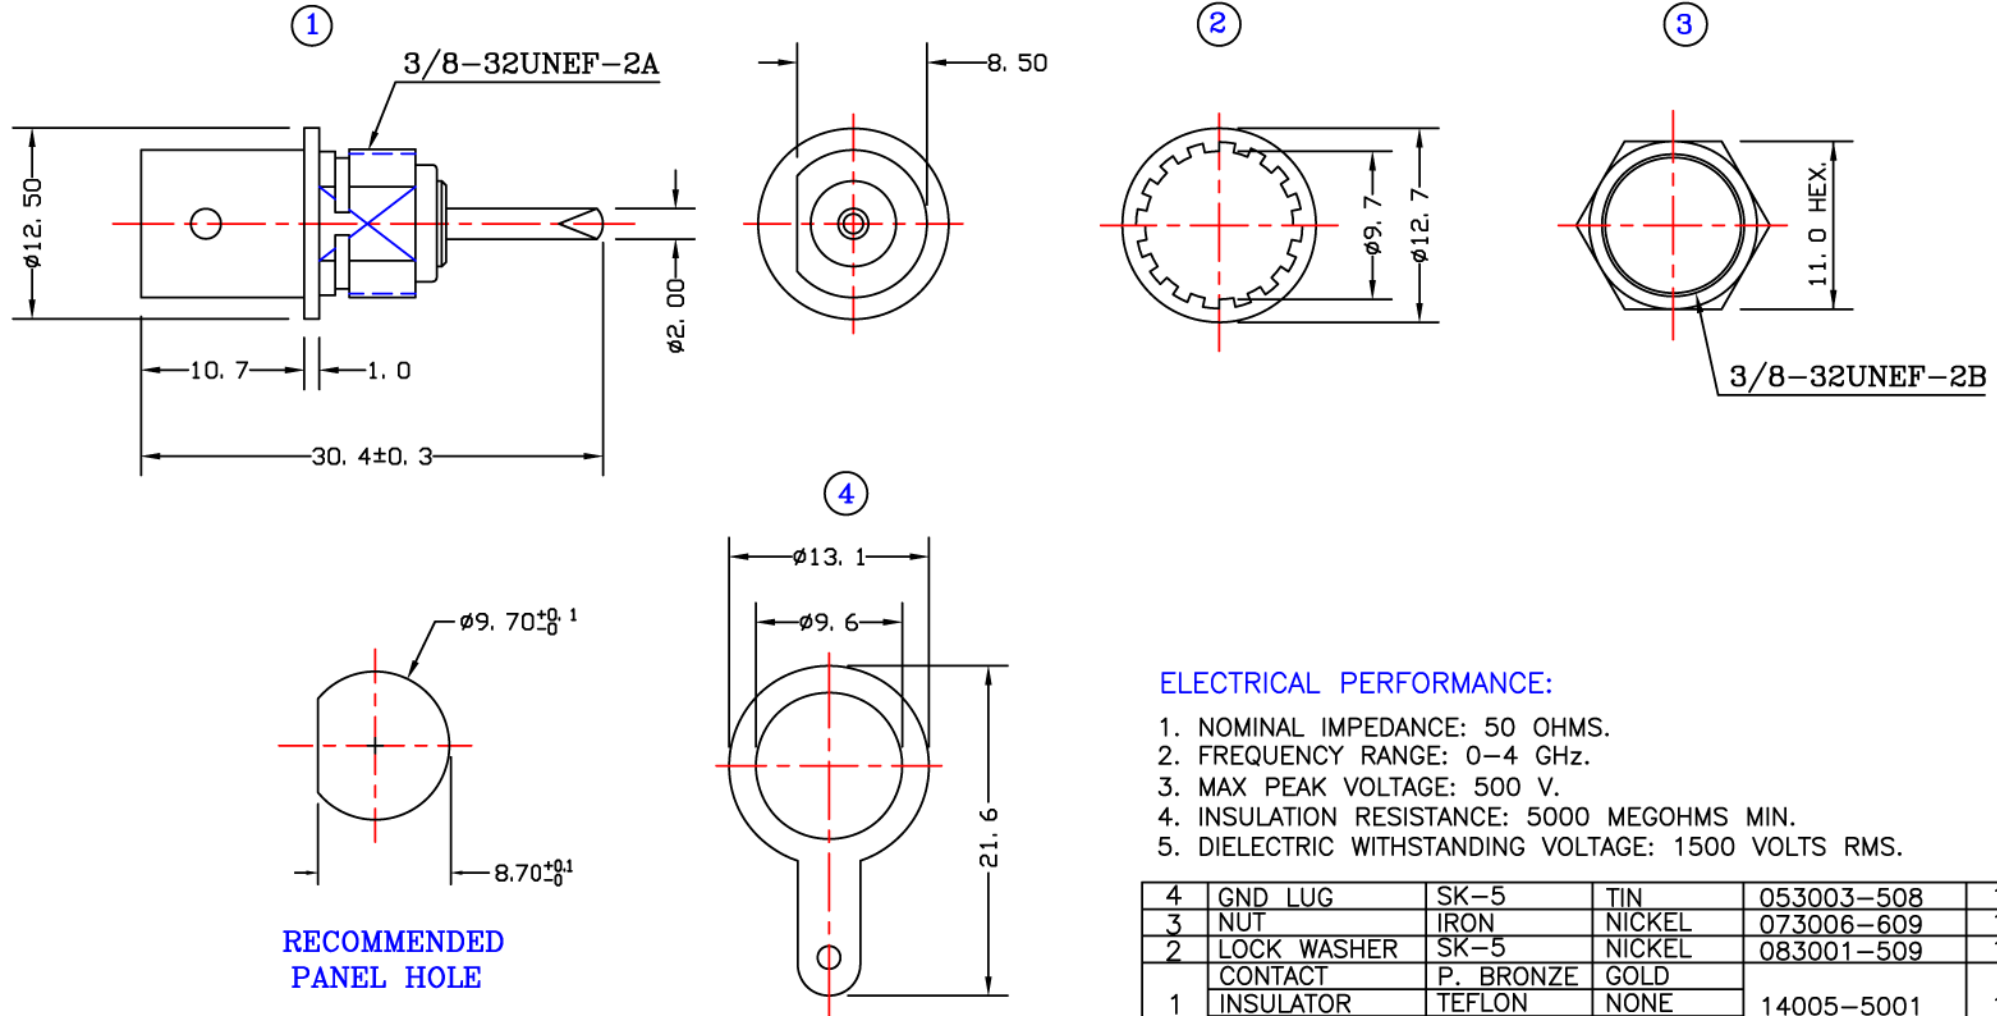

**RECOMMENDED
PANEL HOLE**

ELECTRICAL PERFORMANCE:

1. NOMINAL IMPEDANCE: 50 OHMS.
2. FREQUENCY RANGE: 0-4 GHz.
3. MAX PEAK VOLTAGE: 500 V.
4. INSULATION RESISTANCE: 5000 MEGOHMS MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS.

ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY
4	GND LUG	SK-5	TIN	053003-508	1
3	NUT	IRON	NICKEL	073006-609	1
2	LOCK WASHER	SK-5	NICKEL	083001-509	1
1	CONTACT	P. BRONZE	GOLD	14005-5001	1
	INSULATOR	TEFLON	NONE		
	BODY	BRASS	NICKEL		

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:	
DIMENSION	ANGLE
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL ±0.5	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS ±0.25	ROUGHNESS
FINISH: SEE TABLE	MATERIAL: SEE TABLE

DRAWN BY: TINA		DATE: 10-08'2008		TITLE: BNC ST. JACK BULKHEAD RECEPTACLE	
ENGR BY: TINA		DATE: 10-08'2008		Model NO: 14005	
APVD BY:		DATE:		Drawing NO: 12-14005	
UNIT: MM	SIZE: A4	REV: A	CAD FILE:		
SCALE: 2:1	SHEET: 1	OF: 1	Z:\NEW Dwg\14XXX\14005		