

MATERIAL


Insulator : Hi-temp PPS. UL 94V-0, 240°C
 Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 1000MΩMin. at DC 500V
 Contact Resistance : 30mΩMax. at DC 100mA
 Operation Temperature : -50°C to + 105°C

981-2 2- xx 4 0 0 1
 1 2 3 4 5 6 7

- 1. 1: DIP
- 2: SMT
- 2. 2: Tube
- 3. No. of contacts
- 4. 2: Brown Insulator
- 4: Brown Insulator (Green Product)
- 5. 0: Without stand off
- 6. 0: Tin plated
- 7. Pinrex internal code.

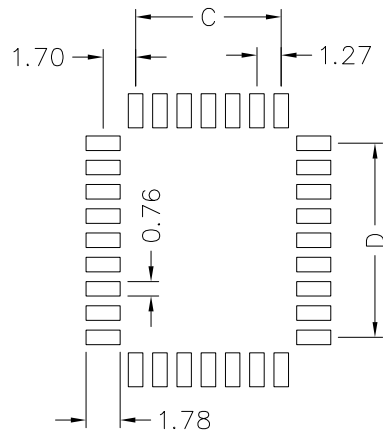

Recommended P.C.B Layout

No. of contacts	A	B	C	D	E
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	22.20
44	23.28	23.28	12.70	12.70	27.80
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.75
84	35.98	35.98	25.40	25.40	46.00

				<p>TOLERANCE</p> <p>.0 =±.30</p> <p>.00 =±.20</p> <p>.000 =±.XXX</p> <p>.0000=±.</p> <p>ANG.=±3'</p>		<p>UNITS : mm</p>		<p>OLD PART NO.</p> <p>SPLCC-xxTNB</p>		<p>TITLE</p> <p>PLCC SOCKET SURFACE</p> <p>SMT TYPE, TUBE</p>		<p>頻銳科技股份有限公司</p> <p>PINREX TECHNOLOGY CORP.</p>	
A	RELEASE	2005/01/24		SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.			
REV.	DESCRIPTION	DATE		NONE	A4	1 OF 1	A		981-22-xx4001	981-22-xx4001			