


PRODUCT DATA SHEET

Float - Reed Switch - Plastic

RF - OV11F

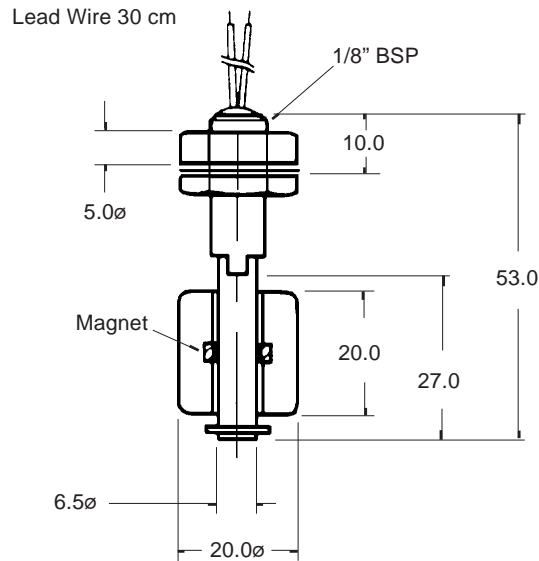

Float position can be reversed to give contacts open or closed in liquid

Drawings not to scale
All dimensions in mm nominal

SPECIFICATION

CONTACT FORM		Reversible Float
SWITCHING VOLTAGE	Max. V	125Vac
SWITCHING CURRENT	Max. A	0.5
CARRY CURRENT	Max. A	1.0
SWITCHING CAPACITY	Max. VA	10
CONTACT RESISTANCE	Max. mΩ	200
LEAD WIRE		XLPE AWG22
REVERSIBLE SWITCH ACTION		Yes
OPERATING PRESSURE	Max. Kg/cm ²	1.0
OPERATING TEMPERATURE	Deg. °C	-20° +80°
MATERIAL		Polypropylene
SUITABLE SPECIFIC GRAVITY		0.9
WEIGHT	gm.	12
CLEARANCE HOLE DIA.	mm.	10



Rev. No.	Revision Note	Date
A	Web Site 2002	1-2-02

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

©2002
Active Switch & Sensor Limited