

Part Number: PRA 240/30 (Alternate Part No: S1264)
Proximity Switch - Reed Switch based
Cylindrical - Normally Open Contacts - Suggested Magnet: PRM

PICTURE



✓RoHS Compliant


APPLICATIONS INCLUDE

- Position and limit sensing
- Linear actuators
- Security system switch
- Door Switch

FEATURES

- Also available in all Black.
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

DIMENSIONS

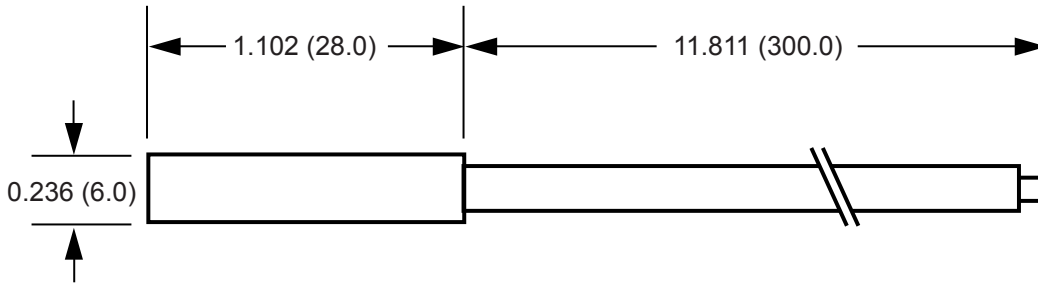

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

Contact Form / Style	Normally Open
Switching Capacity (Resistive)	10 WVA Max.
Switching Voltage	400 VAC Max.
Switching Current	0.5 A Max.
Carry Current	1.0 A Max.
Breakdown Voltage	600 VDC Min.
Contact Resistance	150 mOhms Max.
Switching Distance	5 mm Min.
Operating Temperature Range	-20°C +85°C
Storage Temperature Range	-25°C +90°C
Case Material	Blue Nylon 66
Cable	2 x Round 0.14mm ² PVC covered Grey and insulated Brown / White

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtch) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA