

SAFETY ISOLATING TRANSFORMER





POWER : 3.2VA  
 INPUT VOLTAGE : 117V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 15V

NON SHORT CIRCUIT PROOF TRANSFORMER  
 IP00  
 UL94V0

OPERATING TEMPERATURE : -25°C to 70°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 REQUIRED PROTECTION : 250mA FUSE ON SECONDARY

STANDARDS :  
 UL506 (File E111078)  
 CSA 22-2 (File E111078)  
 CE

CONFORM TO :  
 EN61558-1  
 EN61558-2-6

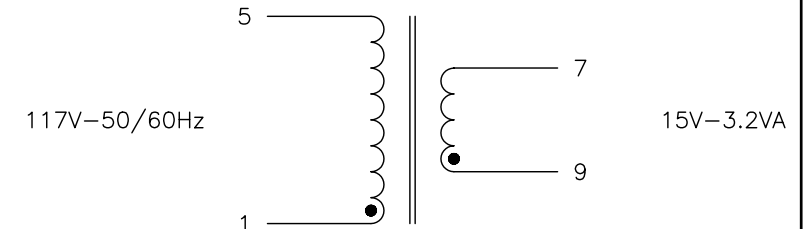

Finition:		Tolérance générale:	
Finition:		General tolerance:	
Ech: 1:1	Matière:		
	Material:		
Dessiné par: ROUSSEL.Ch	Date: 22/09/2005	Visa: J.P.M.	

D					
C					
B					
A					
Rev	Date	Modification	Dessiné	Visa	

**DATA SHEET 44208**  
**EI 38x13.6**

22 Allée du Clos des Charmes  
 Z.A. Les Portes de la Forêt  
 77090 COLLEGIEN  
 Tel : 01-60-37-55-55  
 Fax : 01-60-17-12-00

DS44208