


Threaded Proximity Switch - Normally Open Contacts
Part Number : PTA 230/330
Product Data Sheet

PICTURE



DIMENSIONS

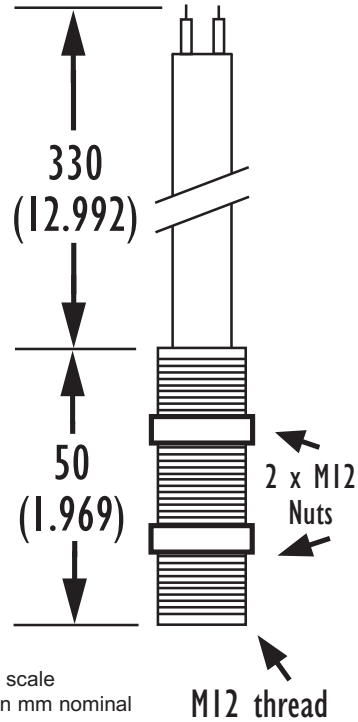

Drawings not to scale
 All dimensions in mm nominal

✓ RoHS Compliant

SPECIFICATION

Contact Form / Style	Normally Open	
Switching Voltage	Max Volts AC	230
Switching Current	Max Amps	3.0
Switching Capacity (Resistive)	Max W/VA	60
Switching Distance	Min mm	10
Contact Resistance	Max mOhms	80
Operating Temperature	Celsius	-20° to 85°
Case Material	Brass	
Cable	2 x Round 0.50mm ² Black PVC insulated, Brown & Blue	

Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

Options

- Also available without thread.
- Normally Closed version available.
- Custom cable types, cable lengths, connectors or crimp terminals available.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

Did you know we also sell?



Rev. No.

Revision Note

Date

Signature

1

Datasheet

16-07-12

ML



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

www.assemtech.co.uk

Fax: +44 (0)1255 862014

©2012 Copyright Assemtech Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.
 USA: Comus International:+1 973 777 6900, Belgium: Comus Belgium BVBA: +32 (0)12 390400