


Recommended P.C.B Layout



60,64P 為三窗口

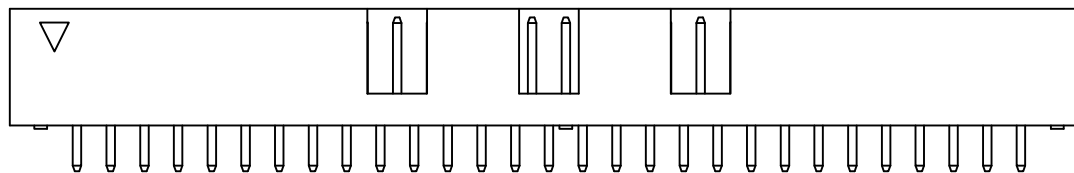

MATERIAL

Insulator: PBT UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

510-x 0- xx x x xx
1 2 3 4 5

- 1. 7: Green Product
- 9: Green Product High Temp
- 2. No. of contacts
- 3. G: Gold flash
- S: Selective
- T: Tin plated
- 4. B: Black Insulator
- W: White Insulator
- 5. Pinrex internal code.

☆ Special Type

POLES	DIM A	DIM B	DIM C
☆ 6	12.66	10.26	5.08
6	15.20	12.80	5.08
☆ 8	15.20	12.80	7.62
8	17.78	15.48	7.62
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	61.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.66
64	88.88	86.68	78.74

REV.	DESCRIPTION	DATE
A	RELEASE	2020/11/09

TOLERANCE

.0 =±.30

.00 =±.20

.000 =±.XXX

.0000=±.

ANG.=±3'

UNITS : mm

SCALE NONE

SIZE A4

OLD PART NO.

DRAWER 姜文慧

CHECK 李劍

SHEET 1 OF 1

REV. A

APP'D 李劍

TITLE BOX HEADER 2.54*2.54mm, STRAIGHT TYPE

NEW PART NO. 510-x0-xxxxxxx

DRAW NO. 510-x0-xxxxxx(網頁專用圖)

频锐科技股份有限公司
PINREX TECHNOLOGY CORP.