

SPECIFICATIONS

CONTACT RATING: 5A @125 VAC or 28 VDC (Q contact)
ELECTRICAL LIFE:50,000 make-and-break cycles at full load
CONTACT RESISTANCE: 10 mΩ max. initial @2-4 VDC,100 mA
INSULATION RESISTANCE: 1,000 MΩ min.
DIELECTRIC STRENGTH: 1,500 V RMS @ sea level.
OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS

CASE - diallyl phthalate (DAP)
TOGGLE HANDLE - Copper alloy , chrome plated
BUSHING - Copper alloy , nickel plated
HOUSING - Stainless Steel
CONTACT AND TERMINAL - copper alloy, silver plated

How do you build the switches you need!!

The straight type , please see the (A) ;

The right angle P.C terminals, please see the (B)

(A) T 8 0 1 3 - S E C Q - E - S 2 0 - T 1 - 2 -

Table (A) detailing specifications for straight type switches, including columns for Switch Function, Actuator, Bushing, Termination, Vertical support Bracket, Cap color, O Ring, Epoxy seal, and RoHS code.

(B) T 8 0 1 9 L - T N Q - E - S - T 2 - 2 -


Table (B) detailing specifications for right angle P.C terminals switches, including columns for Horizon Right Angle, Vertical Right Angle, Switches Function, Actuator, Bushing, Contact Material, Actuator Cap, Epoxy seal, Support Bracket type, and RoHS code.



SPDT



Model No.	Switching position		
T8013	ON	none	ON
T8013A	ON	none	(ON)
T8014	ON	OFF	ON
T8014A	(ON)	OFF	(ON)
T8014B	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1

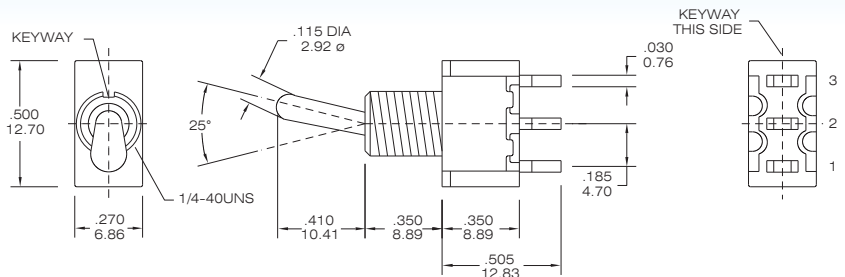


T8013 - SEBQ

DPDT



Model No.	Switching position		
T8011	ON	none	ON
T8011A	ON	none	(ON)
T8012	ON	OFF	ON
T8012A	(ON)	OFF	(ON)
T8012B	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
T812	ON	ON	ON
T812A	(ON)	ON	(ON)
T812B	ON	ON	(ON)
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

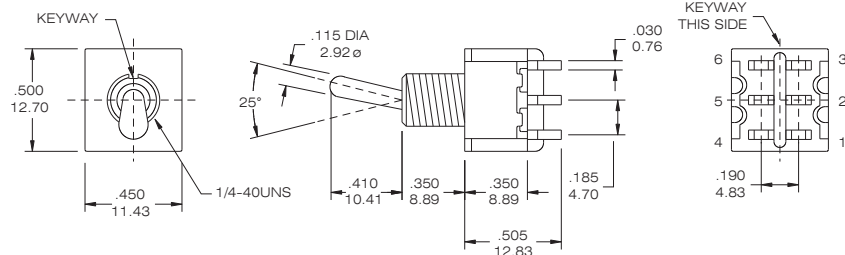



T8011 - SEBQ

Please see page A18 to know more about T812 (3-way Switches)

3PDT



Model No.	Switching position		
T8301	ON	none	ON
T8303	ON	none	(ON)
T8305	ON	OFF	ON
T8307	(ON)	OFF	(ON)
T8309	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9	open	2-1,5-4 8-7

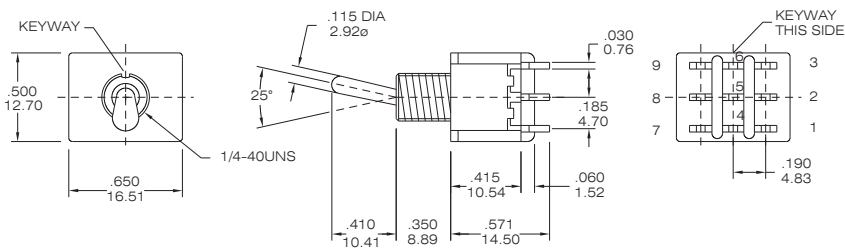


T8301- SEBQ

4PDT



Model No.	Switching position		
T8401	ON	none	ON
T8403	ON	none	(ON)
T8405	ON	OFF	ON
T8407	(ON)	OFF	(ON)
T8409	ON	OFF	(ON)
Term. Comm.	2-3,5,6 8-9,11-12	open	2-1,5,4 8-7,11-10
3 way switches (DP3T)			
T845	ON	ON	ON
T847	(ON)	ON	(ON)
T849	ON	ON	(ON)
Term. Comm.	2-3,5,6 8-9,11-12	2-3,5,4 8-9,11-10	2-1,5,4 8-7,11-10

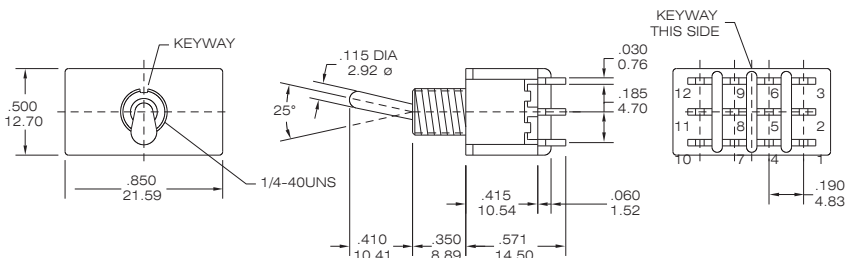

T8401 - SEBQ

Please see page A18 to know more about T845 (3-way Switches)




FEATURE


The T80-T series P.C.B Mounted Toggle Switches - Right Angle Type - are specially designed for P.C. Boards . Easy to mount and install securely with a vertical support rack . The toggle operates in the same direction as the print connectors . Customers' specifications of pitch are acceptable.

HORISON RIGHT ANGLE

SPDT



Model No.	Switching position		
T8019	ON	none	ON
T8019A	ON	none	(ON)
T8020	ON	OFF	ON
T8020A	(ON)	OFF	(ON)
T8020B	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1

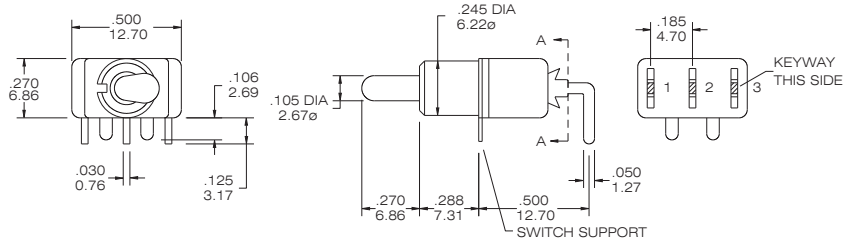


T8019 - TNQ

DPDT




Model No.	Switching position		
T8021	ON	none	ON
T8021A	ON	none	(ON)
T8022	ON	OFF	ON
T8022A	(ON)	OFF	(ON)
T8022B	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
T822	ON	ON	ON
T822A	(ON)	ON	(ON)
T822B	ON	ON	(ON)
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

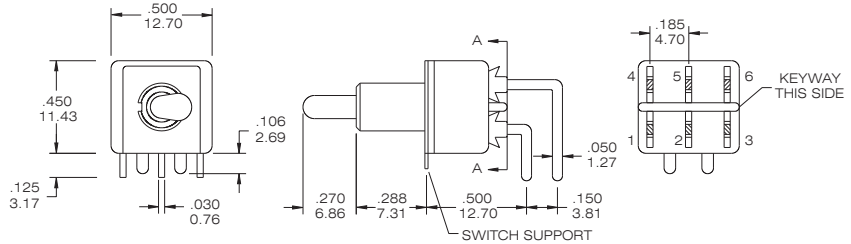


T8021 - TNQ

Please see page A18 to know more about T822 (3-way Switches)

3PDT




Model No.	Switching position		
T8301P(A)	ON	none	ON
T8303P(A)	ON	none	(ON)
T8305P(A)	ON	OFF	ON
T8307P(A)	(ON)	OFF	(ON)
T8309P(A)	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
	8-9		8-7

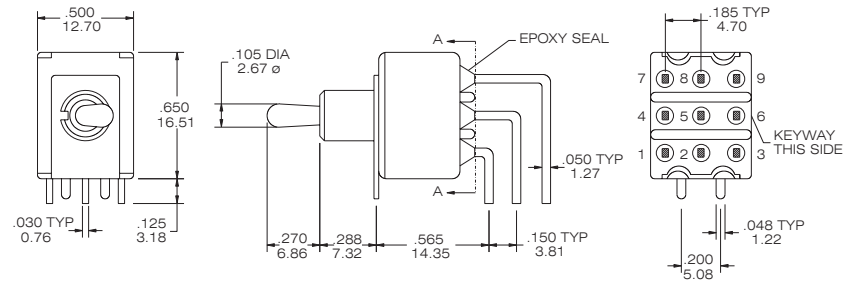


T8301P(A)- TNQ

P.C.B MOUNTING DIMENSIONS


FOR T8019-T8020B



FOR T8021-T8022B




FOR T8301P(A)-T8309P(A)






VERTICAL RIGHT ANGLE

SPDT




Model No.	Switching position		
T8019L	ON	none	ON
T8019LA	ON	none	(ON)
T8020L	ON	OFF	ON
T8020LA	(ON)	OFF	(ON)
T8020LB	ON	OFF	(ON)
Term. Comm.	2-3	open	2-1

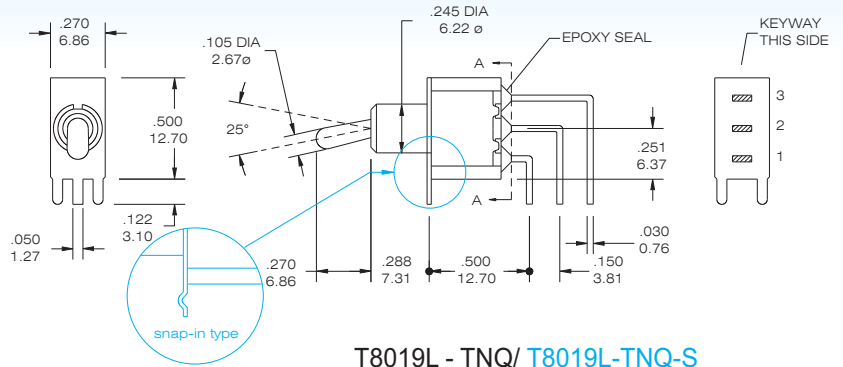

DPDT




Model No.	Switching position		
T8021L	ON	none	ON
T8021LA	ON	none	(ON)
T8022L	ON	OFF	ON
T8022LA	(ON)	OFF	(ON)
T8022LB	ON	OFF	(ON)
Term. Comm.	2-3,5-6	open	2-1,5-4
3 way switches (SP3T)			
T822L	ON	ON	ON
T822LA	(ON)	ON	(ON)
T822LB	ON	ON	(ON)
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

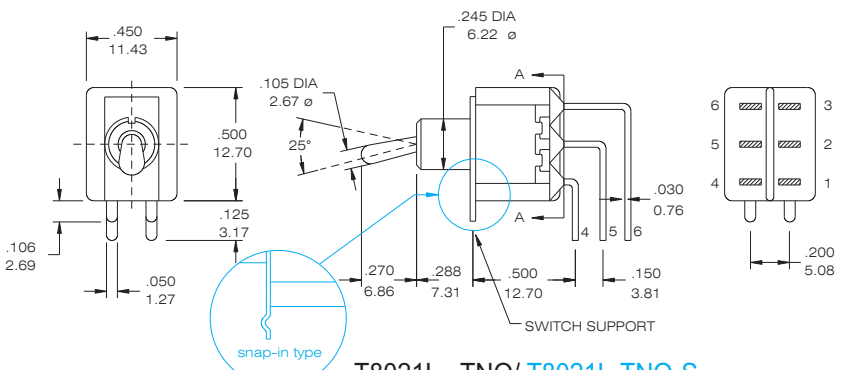


Please see page A18 to know more about T822L (3-way Switches)

3PDT




Model No.	Switching position		
T8301P	ON	none	ON
T8303P	ON	none	(ON)
T8305P	ON	OFF	ON
T8307P	(ON)	OFF	(ON)
T8309P	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9	open	2-1,5-4 8-7

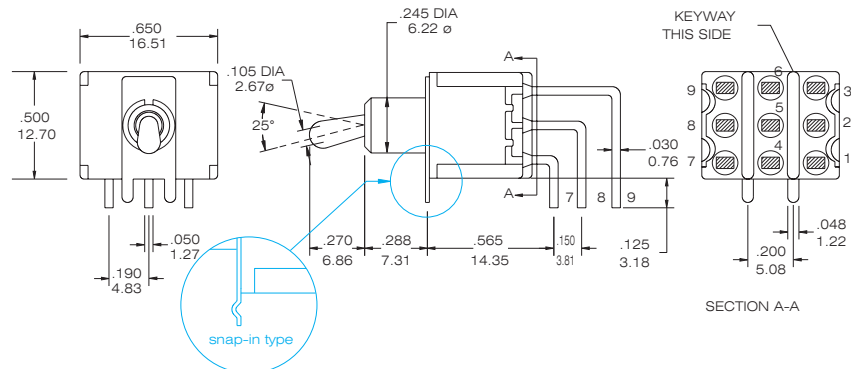

4PDT




Model No.	Switching position		
T8401P	ON	none	ON
T8403P	ON	none	(ON)
T8405P	ON	OFF	ON
T8407P	(ON)	OFF	(ON)
T8409P	ON	OFF	(ON)
Term. Comm.	2-3,5-6 8-9,11-12	open	2-1,5-4 8-7,11-10
3 way switches (DP3T)			
T845P	ON	ON	ON
T847P	(ON)	ON	(ON)
T849P	ON	ON	(ON)
Term. Comm.	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

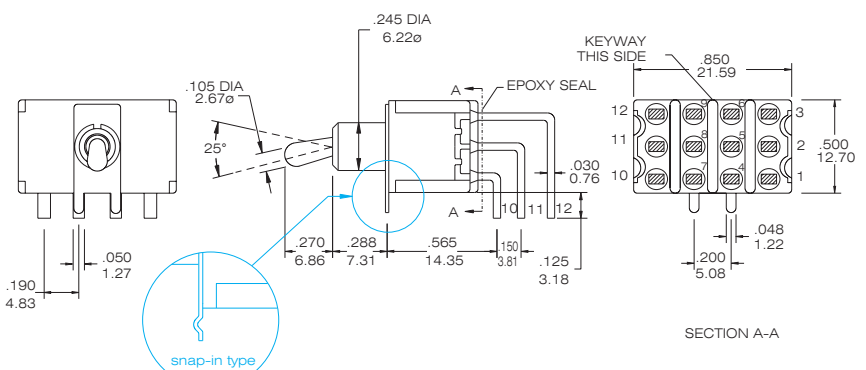


Please see page A18 to know more about T845P (3-way Switches)

P.C.B MOUNTING DIMENSIONS


FOR T8019L-T8020LB




FOR T8021L-T8022LB



FOR T8301P-T8309P




FOR T8401P-T8409P




Actuator Option


S (STD)




T (STD)




X LONG




W LONG



V LONG



Y PLASTIC




Y HANDLE COLOR NO.	COLOR
1	White
2	Black(std.)
3	Red

the height of actuator is with bushing "E". It will be difference with other bushing option


Now the available color is "2". If you need the others, please inquire first.

Flatted Actuator (ONLY APPLY "H""H1""H2" BUSHING)


U (standard)



U1 (short)




U2 (long)




Locking Lever

LK (round top)




LK1 (flat top)




Bushing Option Code not required unless

- (1) " L " splashproof bushing ordered --LKL / LK1L
- (2) non-thread ordered, choose the bushing code "N" -- LKN / LK1N


Z LARGE TOGGLE
Z4 ANTIROTATION

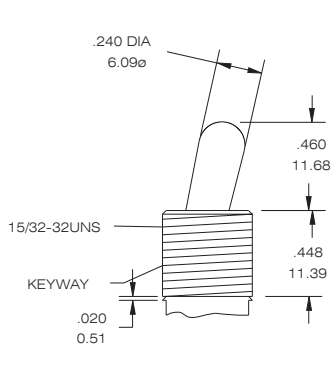


Z1 LARGE TOGGLE
Z3 ANTIROTATION

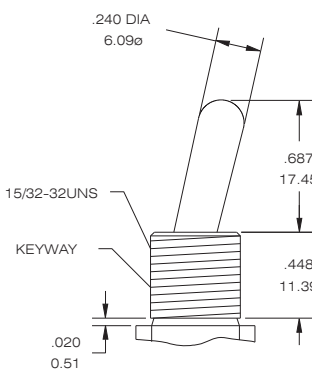

Rubber Hood Sealing



K1=METRIC
E1=INCH
E1-L=INCH




E2 for the large toggle
(15/32-32UNS)

Bushing Option Code not required unless " L " splashproof bushing ordered.


Toggle Cap Option

T1 for actuator "S" only




Material Vinyl

T2 for actuator "T"




Material Vinyl

code	color	code	color	code	color	code	color
0	transparent	1	white	2	black	3	red
4	orange	5	yellow	6	green	7	blue



E3 for the large toggle
(15/32-32UNS)




E6 O RING




Bushing Option


**E THD STD. TYPE
M NON-THD**




**F THD.
N NON-THD**




**HIGH TORQUE
G:THD STD.TYPE
G1:NON-THD**

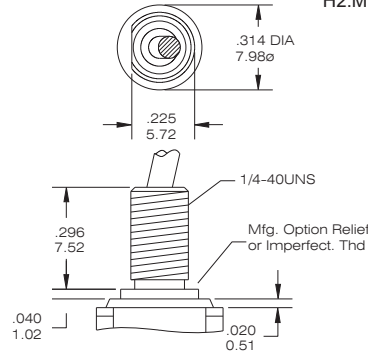


**HIGH TORQUE
H:THD STD.TYPE
H1:NON-THD
H2:METRIC**

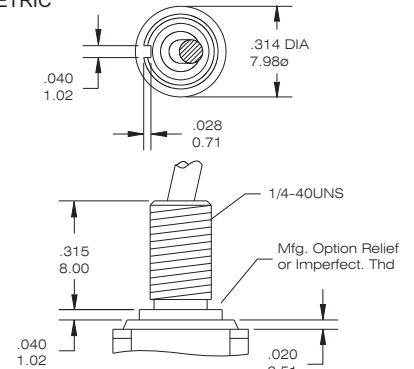






**LONG
J:THD STD.TYPE
J1:NON-THD**

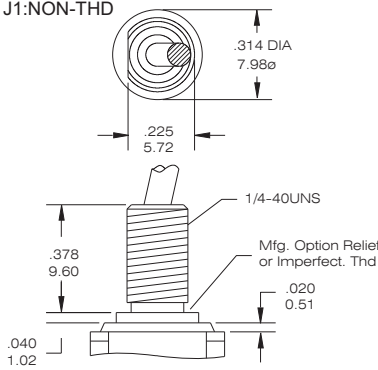


K METRIC



Splash water proof Solution L SPLASH-PROOF

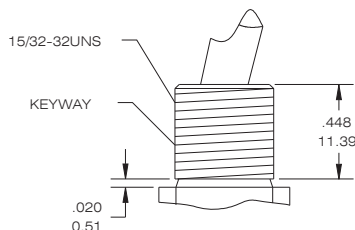


For the Large toggle (Z / Z1 option), the internal actuator seal standard. External bushing seal washer available from: Multi-Flex Seals Inc., Hackensack, NJ. Part no: MFS-60064

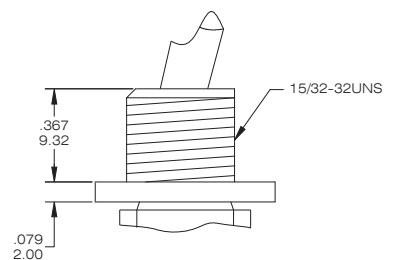


Panel Mounting

1/4 IN. BUSHING

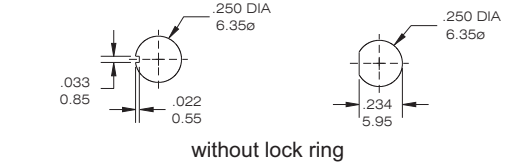


without lock ring

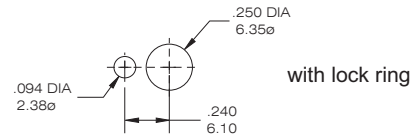


with lock ring

METRIC BUSHING

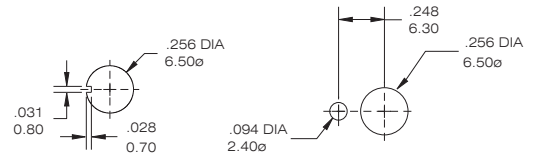

15/32 IN. BUSHING

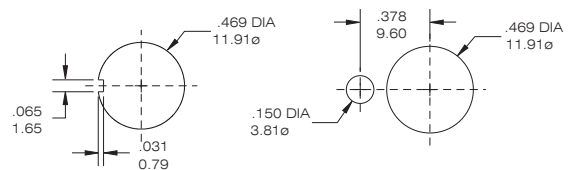

W SPLASH-PROOF

INDEX

TOGGLE

ROCKER

SLIDE

PUSH BUTTON

DIP


TACT



TERMINAL OPTION (ONLY FOR THE STRAIGHT TYPE T8013~T8401)


TERMINAL SEAL OPTION

B SOLDER LUG C PRINTED CIRCUIT D QUICK CONNECT WIREWRAP

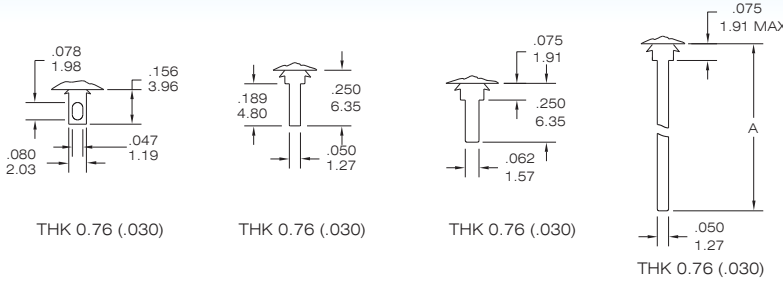

CODE	"A"dimension
D1	.750 (19.05)
D3	.425 (10.8)

E TERMINAL SEAL



CONTACT MATERIAL OPTIONS

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
Q	Silver plated	Silver plated	5 A @ 125 V AC or 28 V DC; 3 A @ 250 V AC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX
G	Gold plated over silver plated	Gold plated over silver plated	0.4 VA MAX @ 20 V AC or DC MAX or 5 A @ 125V AC or 28 VDC; 3 A @ 250 V AC
K	Gold plated over nickel plated	Tin over nickel plated	0.4VA MAX @ 20 V AC or DC MAX



* The K option is only for some special item. Please inquire first when you need the "K" option

VERTICAL SUPPORT BRACKET OPTION

(only apply the straight type terminal -page A12. Please build the terminal option "c" code)

SPDT

S20/S25/V20/V25

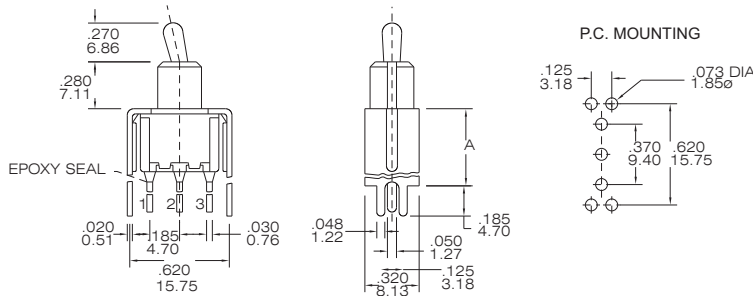

SNAP-IN V20/ V25



CODE	"A"dimension
S20/V20	.460 (11.68)
S25/V25	.630 (16.00)

V20/V25 : the snap-in type

T8013 - TNCQ-S20(S25)

DPDT

S20/S25/V20/V25

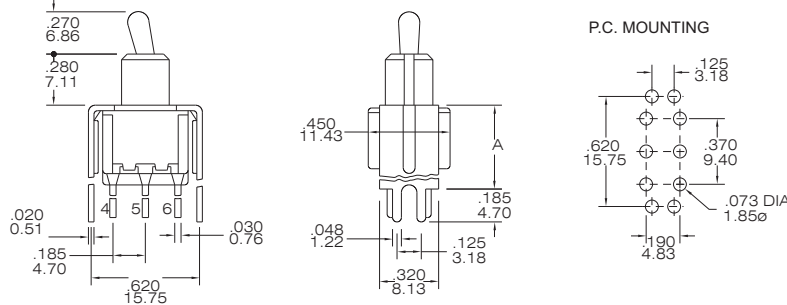

SNAP-IN V20/ V25



CODE	"A"dimension
S20/V20	.460 (11.68)
S25/V25	.630 (16.00)

V20/V25 : the snap-in type

T8011 - TNCQ-S20(S25)

SPDT

S35/S40/V35/V40

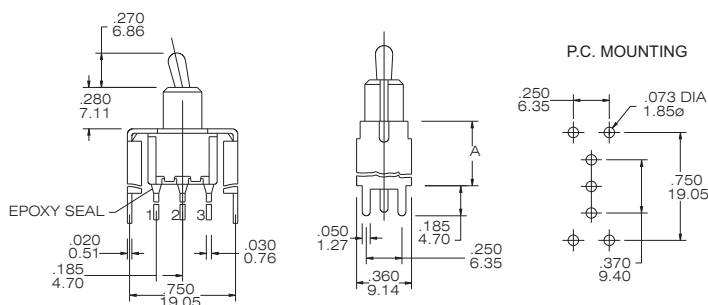


SNAP-IN V35/ V40

CODE	"A"dimension
S35/V35	.460 (11.68)
S40/V40	.630 (16.00)



V35/V40 : the snap-in type

T8013 - TNCQ-S35(S40)



S35 / S40/ V35/V40



DPDT



P.C. MOUNTING



SNAP-IN
V35/ V40


CODE	"A" dimension
S35/V35	.460 (11.68)
S40/V40	.630 (16.00)
V35/V40 : the snap-in type	

T8011 - TNCQ-S35(S40)


The hardware of T80-T TOGGLE SWITCHES

NUT


STD.




DRESS NUT




METRIC NUT




STD. FOR Z Z1



DRESS NUT FOR Z Z1





KNURLED NUT




LOCKING RING

STD




STD. FOR Z Z1




LOCK WASHER



STD.



STD. FOR Z Z1



The information of 3-way toggle switches

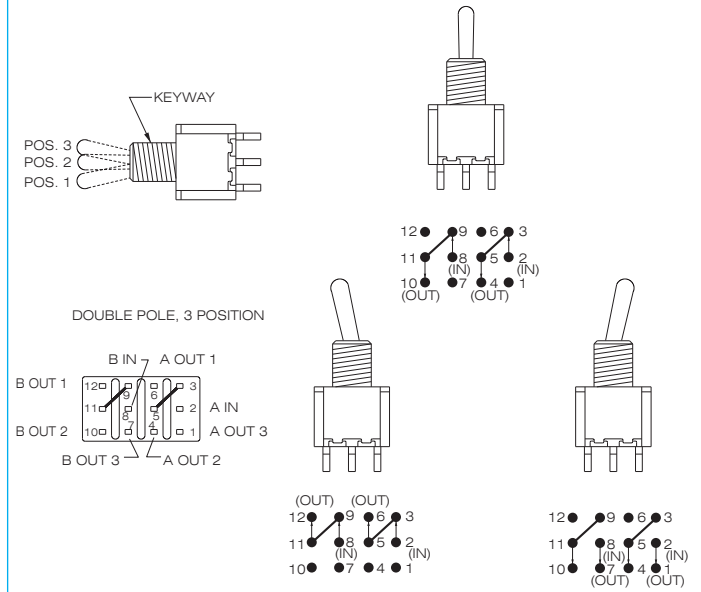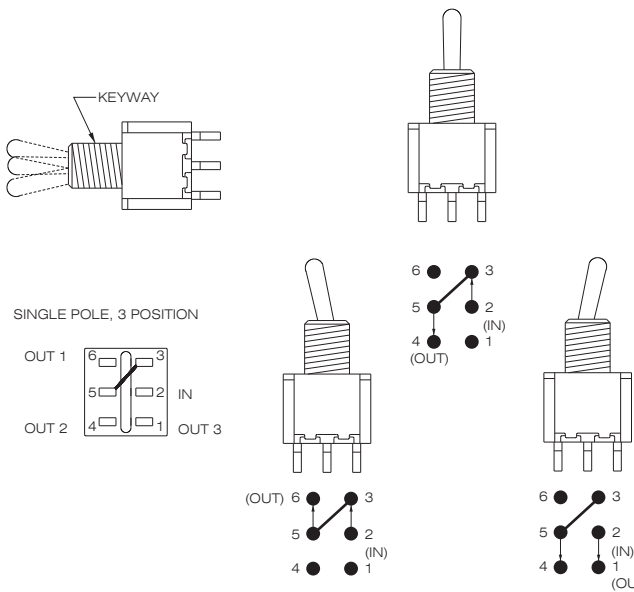

SP3T

DP3T