



**Data sheet | Item number: 2002-2207**

Double-deck terminal block; 4-conductor ground terminal block; 2.5 mm<sup>2</sup>; PE; suitable for Ex e II applications; without marker carrier; internal commoning; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 2,50 mm<sup>2</sup>; green-yellow

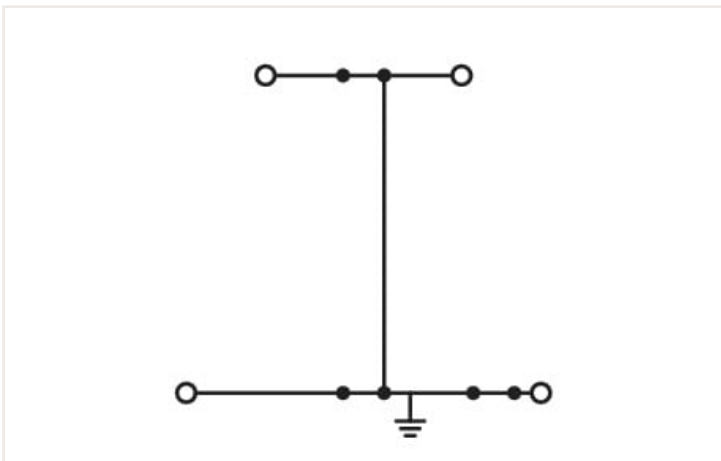

<https://www.wago.com/2002-2207>

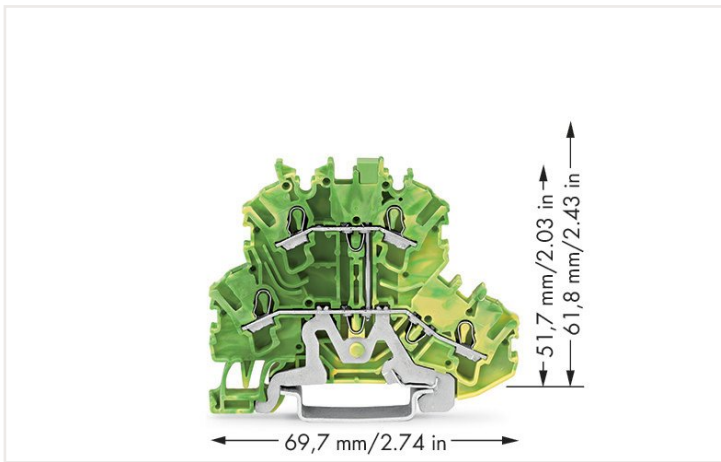

**Electrical data**

| Ratings per IEC/EN |                  |
|--------------------|------------------|
| Ratings per        | IEC/EN 60947-7-2 |

**Ex information**

|                           |   |
|---------------------------|---|
| Reference hazardous areas | See Downloads – Documentation – Additional Information: Technical Section; Technical explanations |
| Ratings per               | ATEX: PTB 03 ATEX 1162 U / IECEx: PTB 03.0004U (Ex eb IIC Gb)                                     |

**Connection data**

|                                   |   |
|-----------------------------------|---|
| Total number of connection points | 4 |
| Total number of potentials        | 1 |
| Number of levels                  | 2 |
| Number of jumper slots            | 3 |

**Connection 1**

|   |  |
|---|--|
| Connection technology                           | Push-in CAGE CLAMP®                          |
| Actuation type                                  | Operating tool                               |
| Connectable conductor materials                 | Copper                                       |
| Nominal cross-section                           | 2.5 mm <sup>2</sup>                          |
| Solid conductor                                 | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG   |
| Solid conductor; push-in termination            | 0.75 ... 4 mm <sup>2</sup> / 18 ... 12 AWG   |
| Fine-stranded conductor                         | 0.25 ... 4 mm <sup>2</sup> / 22 ... 12 AWG   |
| Fine-stranded conductor; with insulated ferrule | 0.25 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG |

### Connection 1

|  |   |
|--|---|
| Fine-stranded conductor; with ferrule; push-in termination | 1 ... 2.5 mm <sup>2</sup> / 18 ... 14 AWG   |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length   | 10 ... 12 mm / 0.39 ... 0.47 inches   |
| Wiring direction   | Front-entry wiring  |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 5.2 mm / 0.205 inches  |
| Height                            | 69.7 mm / 2.744 inches |
| Depth from upper-edge of DIN-rail | 51.7 mm / 2.035 inches |

### Mechanical data

|                   |                     |
|-------------------|---------------------|
| Potential marking | PE                  |
| Mounting type     | DIN-35 rail         |
| Marking level     | Center/side marking |

### Material data

|                             |  |
|-----------------------------|--|
| Note (material data)        | <a href="#">Information on material data can be found here</a> |
| Color                       | green-yellow   |
| Material group              | I  |
| Insulation material         | Polyamide (PA66)   |
| Flammability class per UL94 | V0   |
| Fire load                   | 0.206 MJ   |
| Weight                      | 13.5 g   |

### Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

### Commercial data

|                                     |               |
|-------------------------------------|---------------|
| Product Group                       | 22 (TOPJOB S) |
| eCl@ss 10.0                         | 27-14-11-41   |
| eCl@ss 9.0                          | 27-14-11-41   |
| ETIM 8.0                            | EC000901      |
| ETIM 7.0                            | EC000901      |
| PU (SPU)                            | 50 Stück      |
| Packaging type                      | Box           |
| Country of origin VKOrg Germany     | DE            |
| GTIN                                | 4044918691147 |
| Customs tariff number VKOrg Germany | 85369010000   |

## Approvals and certificates

### Ex-Approvals



| Approval   | Standard       | Certificate name  |
|--|----------------|---|
| AEx<br>Underwriters Laboratories<br>Inc.               | UL 60079       | E185892 (AEx eb IIC resp.<br>Ex eb IIC)                     |
| ATEX<br>Physikalisch Technische<br>Bundesanstalt (PTB) | EN 60079       | PTB 03 ATEX 1162 U (II2G<br>Ex eb IIC Gb, IM2 Ex eb<br>IMb) |
| CCCEX<br>CQST/CNEx                                     | CNCA-C23-01    | 2020312313000238  |
| EAC<br>Brjansker Zertifizierungs-<br>stelle            | TP TC 012/2011 | RU C-DE.AM02.<br>B.00127/19 (Ex e IIC Gb U)                 |
| IECEX<br>Physikalisch Technische<br>Bundesanstalt      | IEC 60079      | IECEX PTB 03.0004U (Ex<br>eb IIC Gb or Ex eb I Mb)          |

### Ship Approvals



| Approval  | Standard | Certificate name |
|---|----------|------------------|
| ABS<br>American Bureau of Ship-<br>ping               | EN 60947 | 20-HG1941090-PDA |
| BV<br>Bureau Veritas S.A.                             | EN 60947 | 38586/B0 BV      |
| DNV GL<br>Det Norske Veritas, Ger-<br>manischer Lloyd | -        | TAE00001V2       |
| LR<br>Lloyds Register                                 | EN 60947 | 91/20112 (E9)    |

### Country specific Approvals



| Approval                        | Standard      | Certificate name |
|---------------------------------|---------------|------------------|
| CCA<br>DEKRA Certification B.V. | EN 60947      | 71-120369        |
| CCA<br>DEKRA Certification B.V. | EN 60947      | NTR NL 7892      |
| CCA<br>DEKRA Certification B.V. | C22.2 No. 158 | 1536069          |

### UL-Approvals



| Approval                                | Standard | Certificate name |
|---|----------|------------------|
| UL<br>Underwriters Laboratories<br>Inc. | UL 1059  | E45172           |

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product  
Compliance 2002-2207



## Documentation

### Additional Information

Technical Section

pdf  
2142.18 KB



### Bid Text

2002-2207

23.04.2019

xml  
3.91 KB



2002-2207

23.04.2019

docx  
15.02 KB



CAD/CAE-Data

| CAD data                               | CAE data                                    |
|--|---|
| <a href="#">2D/3D Models 2002-2207</a> | <a href="#">EPLAN Data Portal 2002-2207</a> |
|  | <a href="#">WSCAD Universe 2002-2207</a>    |
|  | <a href="#">ZUKEN Portal 2002-2207</a>      |

1 Compatible products

1.1 Required accessories

1.1.1 End plate

1.1.1.1 End plate



[Item no.: 2002-2291](#)

End and intermediate plate; 0.8 mm thick; gray

[Item no.: 2002-2292](#)

End and intermediate plate; 0.8 mm thick; orange

1.2 Optional accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories



[Item no.: 210-196](#)

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item no.: 210-198](#)

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



[Item no.: 210-508](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



[Item no.: 210-197](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



[Item no.: 210-506](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



[Item no.: 210-114](#)

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item no.: 210-118](#)

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



[Item no.: 210-115](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



[Item no.: 210-112](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



[Item no.: 210-504](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



[Item no.: 210-113](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



[Item no.: 210-505](#)

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

## 1.2.2 End plate

### 1.2.2.1 End plate



**Item no.: 209-192**

Separator for Ex e/Ex i applications; 3 mm thick; 125.5 mm wide; orange



**Item no.: 2002-2295**

Separator plate; oversized upper deck; snap-fit type; 2 mm thick; gray



**Item no.: 2002-2296**

Separator plate; oversized upper deck; snap-fit type; 2 mm thick; orange

## 1.2.3 Ferrule

### 1.2.3.1 Ferrule



**Item no.: 216-241**

Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item no.: 216-242**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item no.: 216-262**

Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item no.: 216-243**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item no.: 216-263**

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item no.: 216-244**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item no.: 216-264**

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item no.: 216-246**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



**Item no.: 216-266**

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

## 1.2.4 Installation

### 1.2.4.1 Mounting accessories



**Item no.: 709-169**

Cover carrier; Type 3; gray



**Item no.: 709-156**

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

## 1.2.5 Insulation stop

### 1.2.5.1 Insulation stop



**Item no.: 2002-171**

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray



**Item no.: 2002-172**


Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; dark gray

1.2.6 Jumper

1.2.6.1 Jumper

|   |   |   |   |
|---|---|---|---|
| <br><b>Item no.: 2002-400</b><br>Continuous jumper; 2-way; insulated; light gray   | <br><b>Item no.: 2002-423/000-006</b><br>Continuous jumper; from 1 to 3; insulated; blue | <br><b>Item no.: 2002-423</b><br>Continuous jumper; from 1 to 3; insulated; light gray    | <br><b>Item no.: 2002-423/000-005</b><br>Continuous jumper; from 1 to 3; insulated; red                |
| <br><b>Item no.: 2002-406/020-000</b><br>Delta jumper; insulated; light gray       | <br><b>Item no.: 2002-410/000-006</b><br>Jumper; 10-way; insulated; blue                 | <br><b>Item no.: 2002-410</b><br>Jumper; 10-way; insulated; light gray                    | <br><b>Item no.: 2002-410/000-005</b><br>Jumper; 10-way; insulated; red                                |
| <br><b>Item no.: 2002-402/000-006</b><br>Jumper; 2-way; insulated; blue            | <br><b>Item no.: 2002-402</b><br>Jumper; 2-way; insulated; light gray                    | <br><b>Item no.: 2002-402/000-005</b><br>Jumper; 2-way; insulated; red                     | <br><b>Item no.: 2002-403/000-006</b><br>Jumper; 3-way; insulated; blue                                |
| <br><b>Item no.: 2002-403</b><br>Jumper; 3-way; insulated; light gray              | <br><b>Item no.: 2002-403/000-005</b><br>Jumper; 3-way; insulated; red                   | <br><b>Item no.: 2002-404/000-006</b><br>Jumper; 4-way; insulated; blue                    | <br><b>Item no.: 2002-404</b><br>Jumper; 4-way; insulated; light gray                                  |
| <br><b>Item no.: 2002-404/000-005</b><br>Jumper; 4-way; insulated; red             | <br><b>Item no.: 2002-405/000-006</b><br>Jumper; 5-way; insulated; blue                  | <br><b>Item no.: 2002-405</b><br>Jumper; 5-way; insulated; light gray                     | <br><b>Item no.: 2002-405/000-005</b><br>Jumper; 5-way; insulated; red                                 |
| <br><b>Item no.: 2002-406/000-006</b><br>Jumper; 6-way; insulated; blue            | <br><b>Item no.: 2002-406</b><br>Jumper; 6-way; insulated; light gray                    | <br><b>Item no.: 2002-406/000-005</b><br>Jumper; 6-way; insulated; red                    | <br><b>Item no.: 2002-407/000-006</b><br>Jumper; 7-way; insulated; blue                                |
| <br><b>Item no.: 2002-407</b><br>Jumper; 7-way; insulated; light gray            | <br><b>Item no.: 2002-407/000-005</b><br>Jumper; 7-way; insulated; red                 | <br><b>Item no.: 2002-408/000-006</b><br>Jumper; 8-way; insulated; blue                 | <br><b>Item no.: 2002-408</b><br>Jumper; 8-way; insulated; light gray                                |
| <br><b>Item no.: 2002-408/000-005</b><br>Jumper; 8-way; insulated; red           | <br><b>Item no.: 2002-409/000-006</b><br>Jumper; 9-way; insulated; blue                | <br><b>Item no.: 2002-409</b><br>Jumper; 9-way; insulated; light gray                   | <br><b>Item no.: 2002-409/000-005</b><br>Jumper; 9-way; insulated; red                               |
| <br><b>Item no.: 2002-440</b><br>Jumper; from 1 to 10; insulated; light gray     | <br><b>Item no.: 2002-433</b><br>Jumper; from 1 to 3; insulated; light gray            | <br><b>Item no.: 2002-434</b><br>Jumper; from 1 to 4; insulated; light gray             | <br><b>Item no.: 2002-435</b><br>Jumper; from 1 to 5; insulated; light gray                          |
| <br><b>Item no.: 2002-436</b><br>Jumper; from 1 to 6; insulated; light gray      | <br><b>Item no.: 2002-437</b><br>Jumper; from 1 to 7; insulated; light gray            | <br><b>Item no.: 2002-438</b><br>Jumper; from 1 to 8; insulated; light gray             | <br><b>Item no.: 2002-439</b><br>Jumper; from 1 to 9; insulated; light gray                          |
| <br><b>Item no.: 2002-480</b><br>Staggered jumper; 10-way; insulated; light gray | <br><b>Item no.: 2002-481</b><br>Staggered jumper; 11-way; insulated; light gray       | <br><b>Item no.: 2002-482</b><br>Staggered jumper; 12-way; insulated; light gray        | <br><b>Item no.: 2002-473/011-000</b><br>Staggered jumper; 2-way; from 1 to 3; insulated; light gray |
| <br><b>Item no.: 2002-472</b><br>Staggered jumper; 2-way; insulated; light gray  | <br><b>Item no.: 2002-473</b><br>Staggered jumper; 3-way; insulated; light gray        | <br><b>Item no.: 2002-475/011-000</b><br>Staggered jumper; 3-way; insulated; light gray | <br><b>Item no.: 2002-474</b><br>Staggered jumper; 4-way; insulated; light gray                      |
| <br><b>Item no.: 2002-475</b><br>Staggered jumper; 5-way; insulated; light gray  | <br><b>Item no.: 2002-476</b><br>Staggered jumper; 6-way; insulated; light gray        | <br><b>Item no.: 2002-477</b><br>Staggered jumper; 7-way; insulated; light gray         | <br><b>Item no.: 2002-478</b><br>Staggered jumper; 8-way; insulated; light gray                      |
| <br><b>Item no.: 2002-479</b><br>Staggered jumper; 9-way; insulated; light gray  | <br><b>Item no.: 2002-477/011-000</b><br>Staggered jumper; insulated; light gray       | <br><b>Item no.: 2002-479/011-000</b><br>Staggered jumper; insulated; light gray        | <br><b>Item no.: 2002-481/011-000</b><br>Staggered jumper; insulated; light gray                     |

1.2.6.1 Jumper



**Item no.: 2002-405/011-000**  
Star point jumper; 3-way; insulated; light gray

**Item no.: 210-103**  
Wire commoning chain; insulated; black

**Item no.: 210-123**  
Wire commoning chain; insulated; blue

1.2.7 Marking

1.2.7.1 Group marker carrier



**Item no.: 2009-191**  
Group marker carrier; gray

**Item no.: 2009-192**  
Group marker carrier; gray

**Item no.: 2009-193**  
Group marker carrier; gray

1.2.7.2 Marker

|   |  |   |   |
|---|--|---|---|
| <p><b>Item no.: 2009-145/000-006</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue</p>           | <p><b>Item no.: 2009-145/000-007</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray</p>                | <p><b>Item no.: 2009-145/000-023</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green</p>          | <p><b>Item no.: 2009-145/000-012</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange</p>       |
| <p><b>Item no.: 2009-145/000-005</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red</p>            | <p><b>Item no.: 2009-145/000-024</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet</p>              | <p><b>Item no.: 2009-145</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>                  | <p><b>Item no.: 2009-145/000-002</b><br/>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow</p>       |
| <p><b>Item no.: 248-501/000-006</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue</p>  | <p><b>Item no.: 248-501/000-007</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray</p>   | <p><b>Item no.: 248-501/000-023</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green</p>   | <p><b>Item no.: 248-501/000-017</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green</p>                                   |
| <p><b>Item no.: 248-501/000-012</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange</p>  | <p><b>Item no.: 248-501/000-005</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red</p>  | <p><b>Item no.: 248-501/000-024</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet</p>  | <p><b>Item no.: 248-501</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white</p>   |
| <p><b>Item no.: 248-501/000-002</b><br/>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow</p>  | <p><b>Item no.: 793-5501/000-006</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue</p>        | <p><b>Item no.: 793-5501/000-014</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown</p>  | <p><b>Item no.: 793-5501/000-007</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray</p> |
| <p><b>Item no.: 793-5501/000-023</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green</p>  | <p><b>Item no.: 793-5501/000-017</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green</p> | <p><b>Item no.: 793-5501/000-012</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange</p> | <p><b>Item no.: 793-5501/000-005</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red</p>  |
| <p><b>Item no.: 793-5501/000-024</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet</p> | <p><b>Item no.: 793-5501</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>               | <p><b>Item no.: 793-5501/000-002</b><br/>WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow</p> | <p><b>Item no.: 793-501/000-006</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; blue</p>   |
| <p><b>Item no.: 793-501/000-007</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; gray</p>   | <p><b>Item no.: 793-501/000-023</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; green</p>   | <p><b>Item no.: 793-501/000-017</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; light green</p>  | <p><b>Item no.: 793-501/000-012</b><br/>WMB marking card; as card; not stretchable; plain; snap-on type; orange</p>   |

### 1.2.7.2 Marker



**Item no.: 793-501/000-005**

WMB marking card; as card; not stretchable; plain; snap-on type; red



**Item no.: 793-501/000-024**

WMB marking card; as card; not stretchable; plain; snap-on type; violet



**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white



**Item no.: 793-501/000-002**

WMB marking card; as card; not stretchable; plain; snap-on type; yellow



**Item no.: 2009-115/000-006**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



**Item no.: 2009-115/000-007**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



**Item no.: 2009-115/000-023**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



**Item no.: 2009-115/000-017**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



**Item no.: 2009-115/000-012**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



**Item no.: 2009-115/000-005**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



**Item no.: 2009-115/000-024**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

**Item no.: 2009-115/000-002**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

### 1.2.7.3 Marker carrier



**Item no.: 2002-121**

Adaptor; gray



**Item no.: 2002-161**

Adaptor; gray



**Item no.: 2009-198**

Adaptor; gray

### 1.2.7.4 Marking strip



**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.2.8 Protective warning marker

#### 1.2.8.1 Cover



**Item no.: 2002-115**

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow



## 1.2.9 Push-in type wire jumper

### 1.2.9.1 Jumper



**Item no.: 2009-414**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 110 mm long; black



**Item no.: 2009-414/000-005**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 110 mm long; black



**Item no.: 2009-416**

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 250 mm long; black



**Item no.: 2009-414/000-006**

Push-in type wire jumper; insulated; 110 mm long; black



**Item no.: 2009-412**

Push-in type wire jumper; insulated; 60 mm long; black

## 1.2.10 Test and measurement

### 1.2.10.1 Testing accessories



**Item no.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray



**Item no.: 2009-182**

Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray



**Item no.: 2002-649**

TOPJOB®S L-type spacer module; modular; e.g., for bridging commoned terminal blocks; gray



**Item no.: 2002-611**

TOPJOB®S L-type test plug module; modular; 1-pole; 2.50 mm<sup>2</sup>; gray

## 1.2.11 Tool

### 1.2.11.1 Operating tool



**Item no.: 210-658**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured




**Item no.: 210-720**


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

## Installation notes


### Conductor termination




All conductor types at a glance




Push-in termination of solid and ferruled conductors



Inserting a conductor via push-in termination:  
Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.




Inserting a conductor via operating tool:  
Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.  
Advantage:  
To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.




Conductor termination – insulation stop

## Commoning




Removing a push-in type jumper bar: Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper. Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.





Insert push-in type jumper bar and push down until it hits backstop.

## Marking



Snapping WMB Inline markers into marker slots.



Double-deck terminal blocks  
A double-deck marker carrier (2002-121) can be retrofitted to double-deck terminal blocks without a marker carrier.