
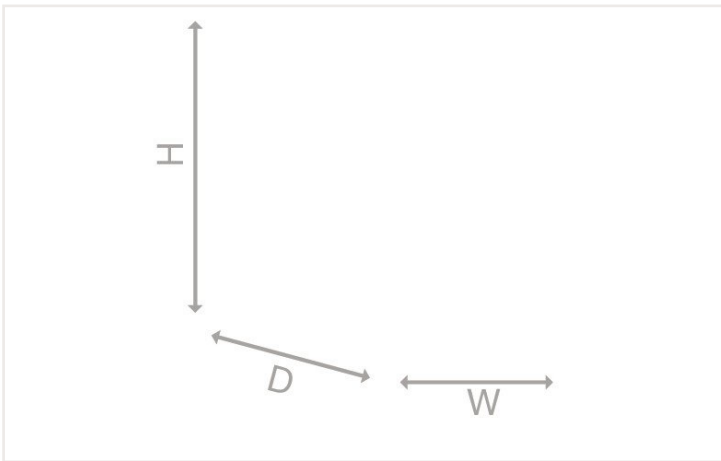


Data sheet | Item number: 787-732

Power supply; Eco; 1-phase; 24 VDC output voltage; 10 A output current; DC-OK LED; 4,00 mm²

<https://www.wago.com/787-732>

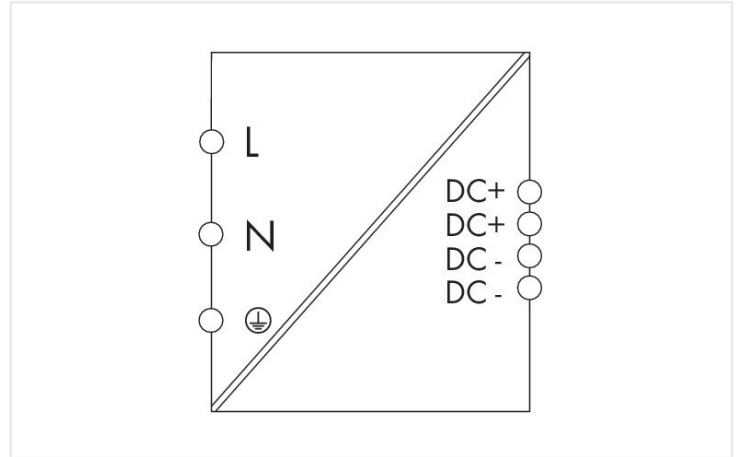

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

Technical data

Input		Output	
Phases	1	Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i, nom}$	1 x AC 110 ... 240 V	Output voltage range	DC 22 ... 28 V (adjustable)
Input voltage range	1 x AC 85 ... 264 V; DC 90 ... 373 V	Default setting	DC 24 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output current $I_{o, nom}$	10 A (24 VDC)
Input current I_i	≤ 1.5 A (230 VAC); ≤ 3 A (115 VAC)	Nominal output power	240 W
Discharge current	≤ 3.5 mA	Deviation	≤ 1 %
Inrush current	≤ 30 A	Residual ripple	≤ 100 mV (Peak-to-peak)
Power factor	≥ 0.94 (230 VAC); ≥ 0.98 (115 VAC)	Overload behavior	Constant power (in overload range: $1.15 \dots 1.4 \times I_{o, nom}$); Shutdown and automatic restart in the event of a short circuit
Power factor correction (PFC)	active		
Mains failure hold-up time	≥ 20 ms (230 VAC)		

Signaling and communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses

Power loss P_I	≤ 37.5 W (230 VAC; nominal load)
Power loss (max.) $P_{I(max)}$	53 W (110 VAC / 24 VDC; 11 A)
Efficiency (typ.)	86 % (230 VAC)

Circuit protection

Internal fuse	F 5 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	\leq DC 28 V
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	480,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 745 Series
Solid conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

Physical data

Width	110 mm / 4.331 inches
Height	92 mm / 3.622 inches
Depth from upper-edge of DIN-rail	136 mm / 5.354 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	10.1 MJ
Weight	1200 g

Environmental requirements

Ambient temperature (operation at U_N)	-10 ... 70 °C
Surrounding air temperature (storage)	-25 ... +85 °C
Relative humidity	≤ 95% (no condensation permissible)
Derating	-2.33 %/K (

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 62368-1 EN 61204-3 cURus 60950-1 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX IEC Ex

Commercial data

Product Group	6 (Interface Electronics)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 Stück
Packaging type	Box
Country of origin	CN
GTIN	4045454908140
Customs tariff number	85044082900

Approvals and certificates

General approvals



Approval	Standard	Certificate name
UL Underwriters Laboratories Inc.	UL 508	E255817
UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Approvals for hazardous areas



Approval	Standard	Certificate name
ATEX UL International Demko A/ S	EN 60079-0	12 ATEX 0931267 X
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079	TÜV20.1339X
UL UL International Germany GmbH	IEC 60079-0	IECEx UL 10.0006 X
UL UL International Germany GmbH (HAZARDOUS LO- CATIONS)	ANSI/ISA 12.12.01	E198726 Section 5

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 787-732			↓

Documentation

Bid Text			
787-732	12.07.2019	xml 6.86 KB	↓
787-732	17.07.2019	docx 20.91 KB	↓

Instruction Leaflet			
Primary Switch Mode	V 2.2.10	pdf	↓
Power Supply ECO-Power	21.12.2020	179.72 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 787-732	↓

CAE data	
EPLAN Data Portal 787-732	↓
WSCAD Universe 787-732	↓
ZUKEN Portal 787-732	↓

1 Compatible products

1.1 Optional accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

<p>Item no.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow</p>	<p>Item no.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise</p>	<p>Item no.: 216-241 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white</p>	<p>Item no.: 216-221 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white</p>
<p>Item no.: 216-242 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray</p>	<p>Item no.: 216-262 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray</p>	<p>Item no.: 216-222 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray</p>	<p>Item no.: 216-243 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red</p>
<p>Item no.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red</p>	<p>Item no.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red</p>	<p>Item no.: 216-224 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black</p>	<p>Item no.: 216-244 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black</p>

1.1.1.1 Ferrule

**Item no.: 216-264**

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

**Item no.: 216-284**

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

**Item no.: 216-246**

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

**Item no.: 216-266**

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

**Item no.: 216-286**

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

1.1.2 Tool

1.1.2.1 Operating tool

**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

**Item no.: 210-769**

SCREWDRIVER; green